



IP Office 9.0

IP Office Customer Call Reporter
Custom Reporting

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

For full support, please see the complete document, Avaya Support Notices for Hardware Documentation, document number 03-600759.

For full support, please see the complete document, Avaya Support Notices for Software Documentation, document number 03-600758.

To locate this document on our website, simply go to <http://www.avaya.com/support> and search for the document number in the search box.

Documentation disclaimer

"Documentation" means information published by Avaya in varying mediums which may include product information, operating instructions and performance specifications that Avaya generally makes available to users of its products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of documentation unless such modifications, additions, or deletions were performed by Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on its hardware and Software ("Product(s)"). Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this Product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <http://support.avaya.com>. Please note that if you acquired the Product(s) from an authorized Avaya Channel Partner outside of the United States and Canada, the warranty is provided to you by said Avaya Channel Partner and not by Avaya. "Software" means computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products or pre-installed on hardware products, and any upgrades, updates, bug fixes, or modified versions.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, [HTTP://SUPPORT.AVAYA.COM/LICENSEINFO](http://SUPPORT.AVAYA.COM/LICENSEINFO) ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AUTHORIZED AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AUTHORIZED AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA AUTHORIZED AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Avaya grants you a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to you. "Designated Processor" means a single stand-alone computing device. "Server" means a Designated Processor that hosts a software application to be accessed by multiple users.

License type(s)

Designated System(s) License (DS). End User may install and use each copy of the Software only on a number of Designated Processors up to the number indicated in the order. Avaya may require the Designated Processor(s) to be identified in the order by type, serial number, feature key, location or other specific designation, or to be provided by End User to Avaya through electronic means established by Avaya specifically for this purpose.

Concurrent User License (CU). End User may install and use the Software on multiple Designated Processors or one or more Servers, so long as only the licensed number of Units are accessing and using the Software at any given time. A "Unit" means the unit on which Avaya, at its sole discretion, bases the pricing of its licenses and can be, without limitation, an agent, port or user, an e-mail or voice mail account in the name of a person or corporate function (e.g., webmaster or helpdesk), or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software. Units may be linked to a specific, identified Server.

Database License (DL). End User may install and use each copy of the Software on one Server or on multiple Servers provided that each of the Servers on which the Software is installed communicates with no more than a single instance of the same database.

CPU License (CP). End User may install and use each copy of the Software on a number of Servers up to the number indicated in the order provided that the performance capacity of the Server(s) does not exceed the performance capacity specified for the Software. End User may not reinstall or operate the Software on Server(s) with a larger performance capacity without Avaya's prior consent and payment of an upgrade fee.

Named User License (NU). You may: (i) install and use the Software on a single Designated Processor or Server per authorized Named User (defined below); or (ii) install and use the Software on a Server so long as only authorized Named Users access and use the Software. "Named User", means a user or device that has been expressly authorized by Avaya to access and use the Software. At Avaya's sole discretion, a "Named User" may be, without limitation, designated by name, corporate function (e.g., webmaster or helpdesk), an e-mail or voice mail account in the name of a person or corporate function, or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software.

Shrinkwrap License (SR). You may install and use the Software in accordance with the terms and conditions of the applicable license agreements, such as "shrinkwrap" or "clickthrough" license accompanying or applicable to the Software ("Shrinkwrap License").

Heritage Nortel Software

"Heritage Nortel Software" means the software that was acquired by Avaya as part of its purchase of the Nortel Enterprise Solutions Business in December 2009. The Heritage Nortel Software currently available for license from Avaya is the software contained within the list of Heritage Nortel Products located at <http://support.avaya.com/LicenseInfo> under the link "Heritage Nortel Products". For Heritage Nortel Software, Avaya grants Customer a license to use Heritage Nortel Software provided hereunder solely to the extent of the authorized activation or authorized usage level, solely for the purpose specified in the Documentation, and solely as embedded in, for execution on, or (in the event the applicable Documentation permits installation on non-Avaya equipment) for communication with Avaya equipment. Charges for Heritage Nortel Software may be based on extent of activation or use authorized as specified in an order or invoice.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, or hardware provided by Avaya. All content on this site, the documentation and the Product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Virtualization

Each vAppliance will have its own ordering code. Note that each instance of a vAppliance must be separately ordered. If the end user customer or Avaya channel partner would like to install two of the same type of vAppliances, then two vAppliances of that type must be ordered.

Each Product has its own ordering code. Note that each instance of a Product must be separately licensed and ordered. "Instance" means one unique copy of the Software. For example, if the end user customer or Avaya channel partner would like to install two instances of the same type of Products, then two Products of that type must be ordered.

Third Party Components

"Third Party Components" mean certain software programs or portions thereof included in the Software that may contain software (including open source software) distributed under third party agreements ("Third Party Components"), which contain terms regarding the rights to use certain portions of the Software ("Third Party Terms"). Information regarding distributed Linux OS source code (for those Products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the Documentation or on Avaya's website at: <http://support.avaya.com/Copyright>. You agree to the Third Party Terms for any such Third Party Components.

Note to Service Provider

The Product may use Third Party Components that have Third Party Terms that do not allow hosting and may need to be independently licensed for such purpose.

Preventing Toll Fraud

"Toll Fraud" is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If you suspect that you are being victimized by Toll Fraud and you need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at +1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: <http://support.avaya.com>. Suspected security vulnerabilities with Avaya products should be reported to Avaya by sending mail to: securityalerts@avaya.com.

Trademarks

The trademarks, logos and service marks ("Marks") displayed in this site, the Documentation and Product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation and Product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya Inc.

All non-Avaya trademarks are the property of their respective owners. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: <http://support.avaya.com>.

Contact Avaya Support

See the Avaya Support website: <http://support.avaya.com> for product notices and articles, or to report a problem with your Avaya product. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: <http://support.avaya.com>, scroll to the bottom of the page, and select Contact Avaya Support.

Contents

1. Overview

1.1 Database Access.....	7
1.2 Remote Access.....	7
1.3 Management Studio.....	8

2. Database Details

2.1 Database Tables.....	14
2.1.1 tblAgentActivity.....	16
2.1.2 tblAgentHGBridge.....	16
2.1.3 tblCallList.....	17
2.1.4 tblCallEnd.....	18
2.1.5 tblHuntGroup.....	20
2.1.6 tblReportParameters.....	20
2.1.7 tblReportParametersScheduleLookup.....	20
2.1.8 tblReports.....	21
2.1.9 tblScheduledReport.....	21
2.1.10 tblScheduledReportPeriodLookup.....	21
2.1.11 tblScheduledReportFormatLookup.....	21
2.1.12 tblSwitch.....	22
2.1.13 tblUsers.....	22
2.1.14 Lookup Tables.....	24
2.2 Stored Procedures.....	29
2.3 User Defined Functions.....	32

3. Example

3.1 Development Environment.....	35
3.2 Data Calculation.....	36
3.3 Sample Code.....	37
3.3.1 Stored Procedure.....	37
3.3.2 C# Code.....	42
3.4 Scheduling.....	43
Index.....	0

Chapter 1.

Overview

1. Overview

This document can be used by third party developers as a reference when designing and writing an application that can generate reports using data mined from the IP Office Customer Call Reporter database. This document provides information on how to connect to the IP Office Customer Call Reporter database, discusses the IP Office Customer Call Reporter database design and provides a description of the data stored in the IP Office Customer Call Reporter database.

The developer using this information is deemed to have the knowledge required to access and retrieve data from MS SQL.

The information in this document can be used to create custom reports for IP Office Customer Call Reporter 9.0.

- **! WARNING**

The design of custom reports using the data provided in the IP Office Customer Call Reporter database is the property of the designer and all support associated with it is to be provided by that designer. Removing or modifying any of the Tables, Relations, Stored Procedures, Functions or data within the database will affect IP Office Customer Call Reporter operation and is not supported by Avaya. The existing Stored Procedures and Functions that are part of the database can only be used on an 'as is' basis. New Stored Procedures and Functions can be added, however this should only be done by users with MS-SQL experience and should be tested and validated by them before being applied to a customer system. Avaya will not provide any support for third-party Stored Procedures and Functions.

1.1 Database Access

The IP Office Customer Call Reporter Catalog is called AvayaSBCCRT.

The developer should either get the account and password to use from the administrator that installed IP Office Customer Call Reporter or even better, an account should be created for the developer with just enough privileges to satisfy the requirements. The specific account can also be useful when diagnosing issues with the database by being able to track which applications (IP Office Customer Call Reporter or the Custom Report application) had database transactions.

The connection string for SQL Express needs the default instance name appended to the hostname or IP address (e.g. DataSource=localhost\SQLEXPRESS;).

A backup of the database should be taken as the account used can have the capability to alter the database in such ways that IP Office Customer Call Reporter could become inoperative.

Sample C# code to connect to the database:

```
SqlConnection connection = new SqlConnection("Data Source=localhost\\SQLEXPRESS;Initial  
Catalog=AvayaSBCCRT;uid=username;pwd=password");
```

1.2 Remote Access

If remote access to the database is needed, certain TCP/IP protocols and the SQL browser service need to be enabled on the SQL Server PC. In addition, firewall rules may need to be modified. This is described in the document, <http://support.microsoft.com/kb/914277> and is not needed for local access which is preferred.


1.3 Management Studio

The IP Office Customer Call Reporter database can be “viewed” using the Management Studio application. This can be obtained for free <http://www.microsoft.com/downloads/details.aspx?FamilyID=08E52AC2-1D62-45F6-9A4A-4B76A8564A2B&displaylang=en>.

This tool will show the database and the relation between tables. It will also show the definition for each field in the table and the Stored Procedures and Functions that can be used by the developers if needed. A few screen captures below explains how to use this tool to understand the IP Office Customer Call Reporter database.

- **! WARNING**


The design of custom reports using the data provided in the IP Office Customer Call Reporter database is the property of the designer and all support associated with it is to be provided by that designer. Removing or modifying any of the Tables, Relations, Stored Procedures, Functions or data within the database will affect IP Office Customer Call Reporter operation and is not supported by Avaya. The existing Stored Procedures and Functions that are part of the database can only be used on an 'as is' basis. New Stored Procedures and Functions can be added, however this should only be done by users with MS-SQL experience and should be tested and validated by them before being applied to a customer system. Avaya will not provide any support for third-party Stored Procedures and Functions.

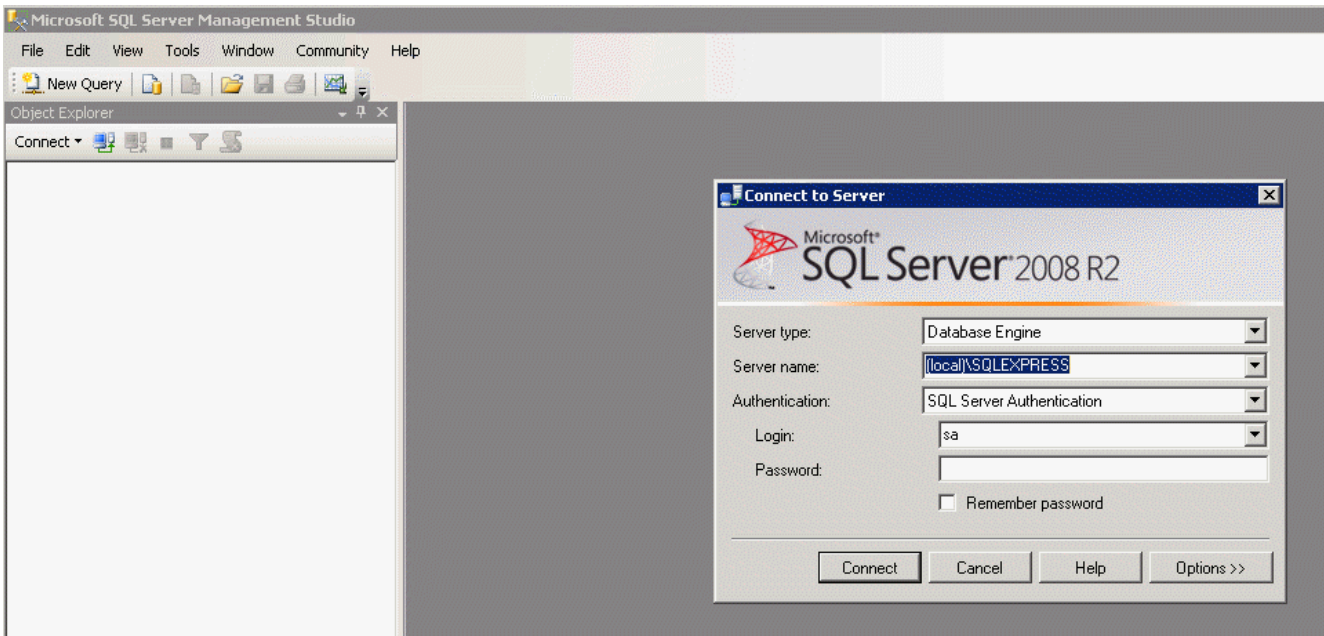


Database Diagrams

The tool can be used to display the database schema with the relationship between the tables. It is important to note that this is not a passive view, changes made to the diagram can affect connections within the database.

First, add a table to the Diagram pane.

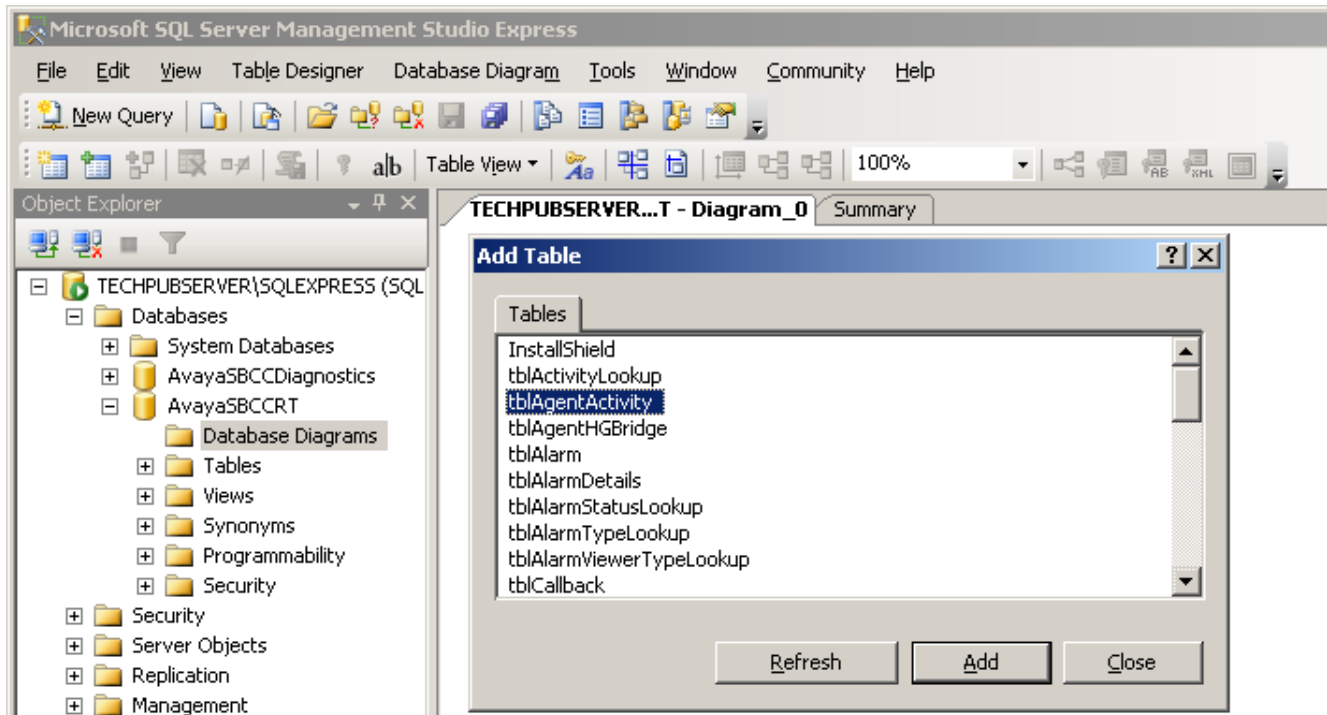


Then, a right click on the added table and a request to add related tables can be made. That will show the relationship between tables. Different views can be selected (table names only, with keys only, with column definitions, etc).

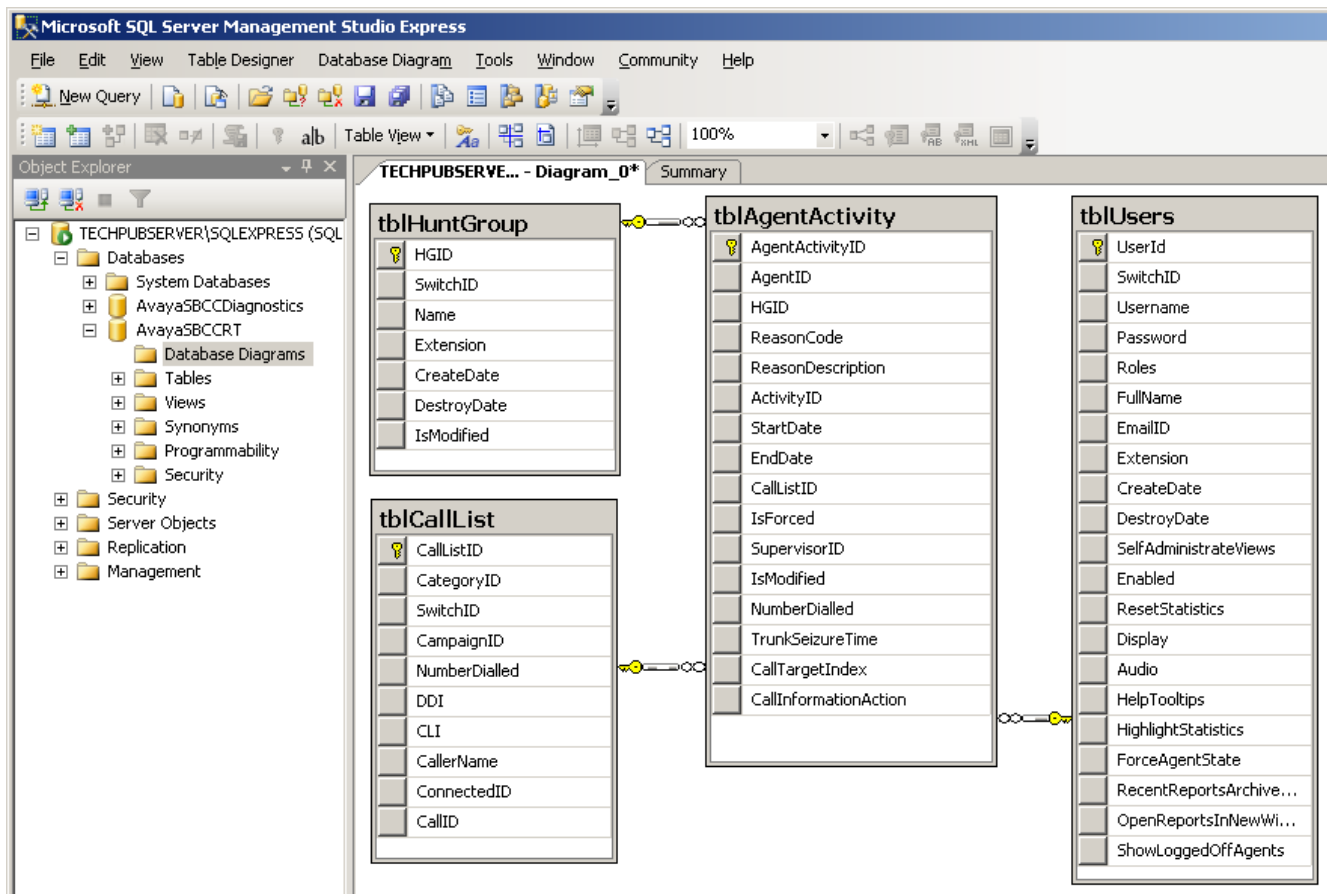


Tables

The [Tables](#) ¹⁴ section has definitions (Columns, Keys, Constraints, and so on) for each database table.

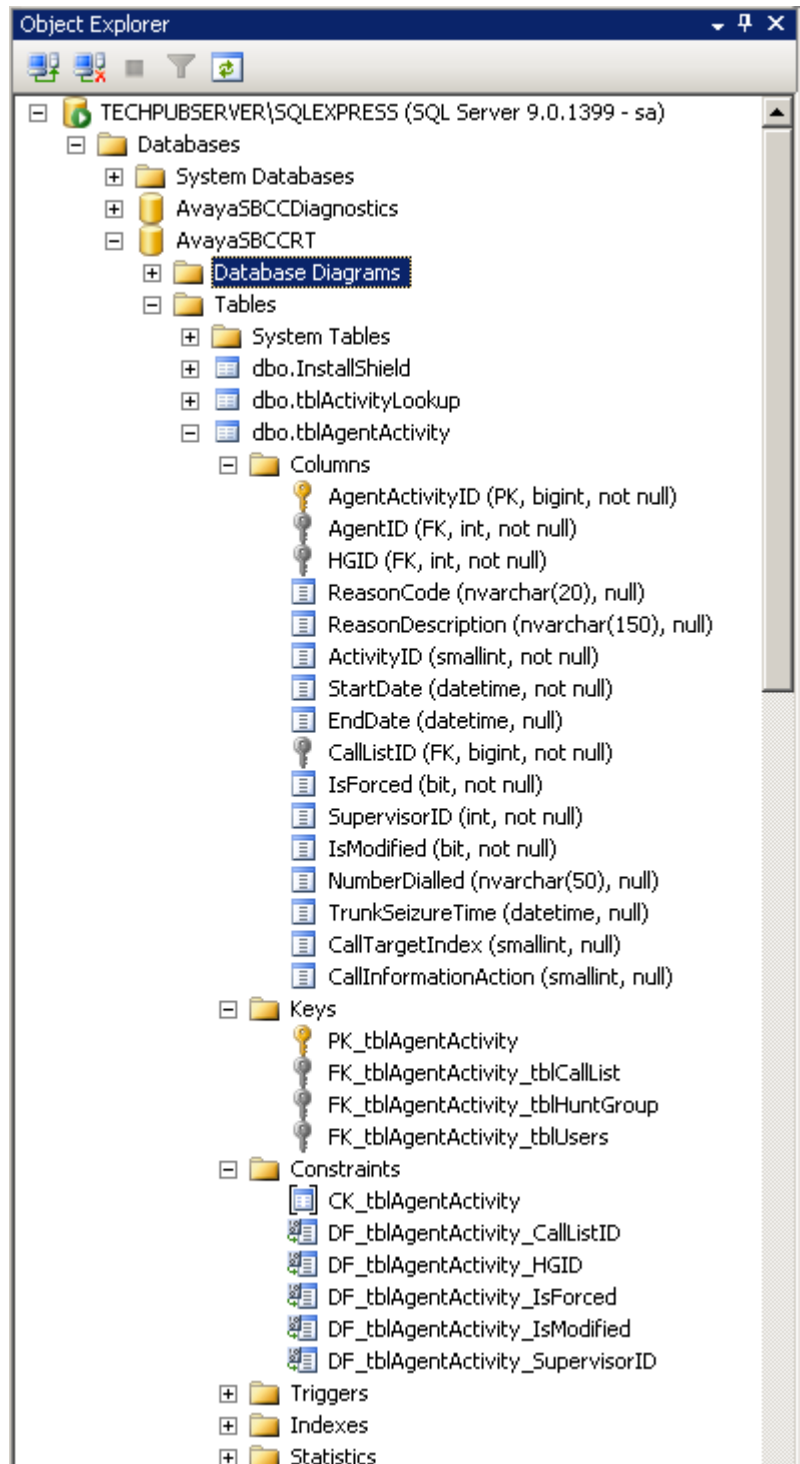


Stored Procedures

A list of the [Stored Procedures](#)^[29] used by IP Office Customer Call Reporter can also be displayed.

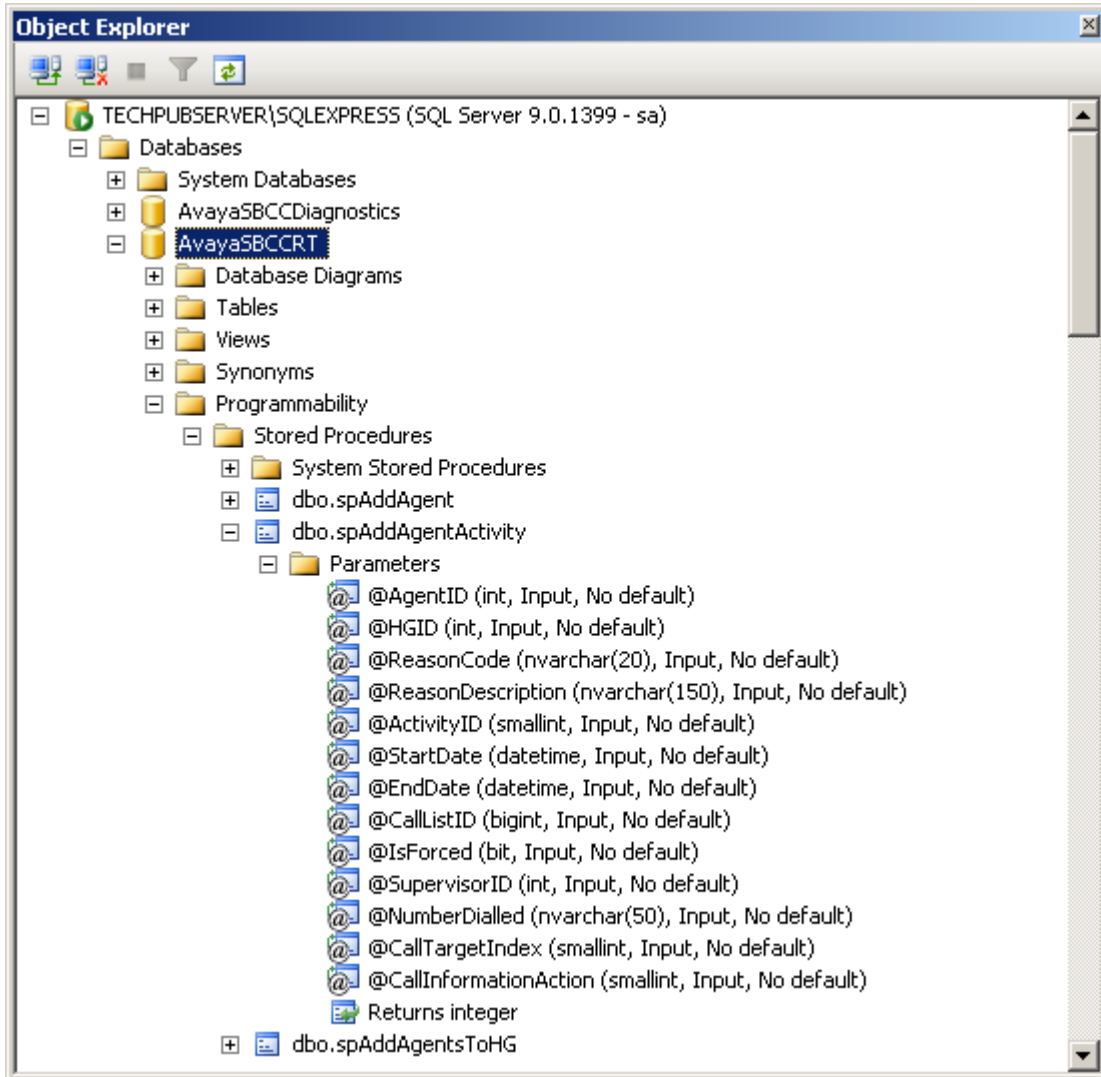

Functions

The list of [Functions](#) (Table-valued or Scalar-valued) can be viewed.

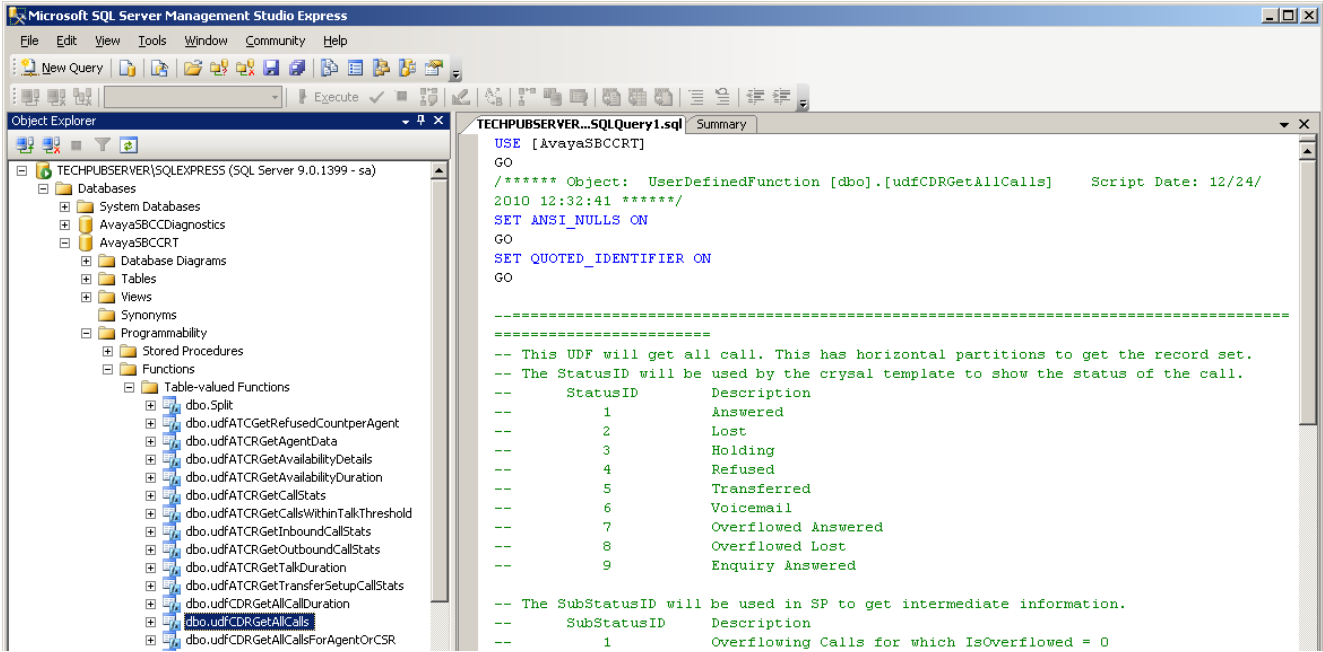

Chapter 2.

Database Details

2. Database Details

- **! WARNING**

The design of custom reports using the data provided in the IP Office Customer Call Reporter database is the property of the designer and all support associated with it is to be provided by that designer. Removing or modifying any of the Tables, Relations, Stored Procedures, Functions or data within the database will affect IP Office Customer Call Reporter operation and is not supported by Avaya. The existing Stored Procedures and Functions that are part of the database can only be used on an 'as is' basis. New Stored Procedures and Functions can be added, however this should only be done by users with MS-SQL experience and should be tested and validated by them before being applied to a customer system. Avaya will not provide any support for third-party Stored Procedures and Functions.


2.1 Database Tables

The tables described here are the ones used by IP Office Customer Call Reporter for reporting purposes.

Table	Category	Purpose
tblAgentActivity ¹⁶	Transactional	Contains detailed activity information for each Agent. It includes call related activity as well as non call activities like Login, Logout , Break , ACW, and so on for an Agent.
tblCallList ¹⁷	Transactional	Contains one record for each call. Call related information is stored here.
tblCallEnd ¹⁸	Transactional	Contains detailed state wise activity of a Call.
tblUsers ²²	Master	Master table for Agents. This table also contains other user info like Supervisor, Administrator, etc.
tblHuntGroup ²⁰	Master	List of Queue / Hunt group .
tblAgentHGBridge ¹⁶	Intersect Master	This table stores many to many relationship between Agent & Hunt group.
tblSwitch ²²	Master	Contains one entry per IPOffice with details.
tblScheduledReport ²¹	Scheduling	List of the Reports Scheduled.
tblScheduledReportPeriodLookup ²¹	Lookup	Stores list of available Report Period options (e.g. Daily, Weekly).
tblScheduledReportFormatLookup ²¹	Lookup	Stores list of available Report Export options (e.g. PDF, Excel, etc.).
tblReportParameters ²⁰	Transactional	Contains report parameters and other info for scheduled reports.
tblReports ²¹	Master	Stores list of the built in basic reports.
tblReportParametersScheduleLookup ²⁰	Lookup	Stores the list of Schedule options.


Not all tables are shown in the following diagrams, only those that are used for reports. For a full database diagram, use the [Management Studio](#) tool. For the purpose of clarity, the diagram is split in two parts. The first part is about call activity and the second is about the reporting. The common table for both is the User table.

Call Activity

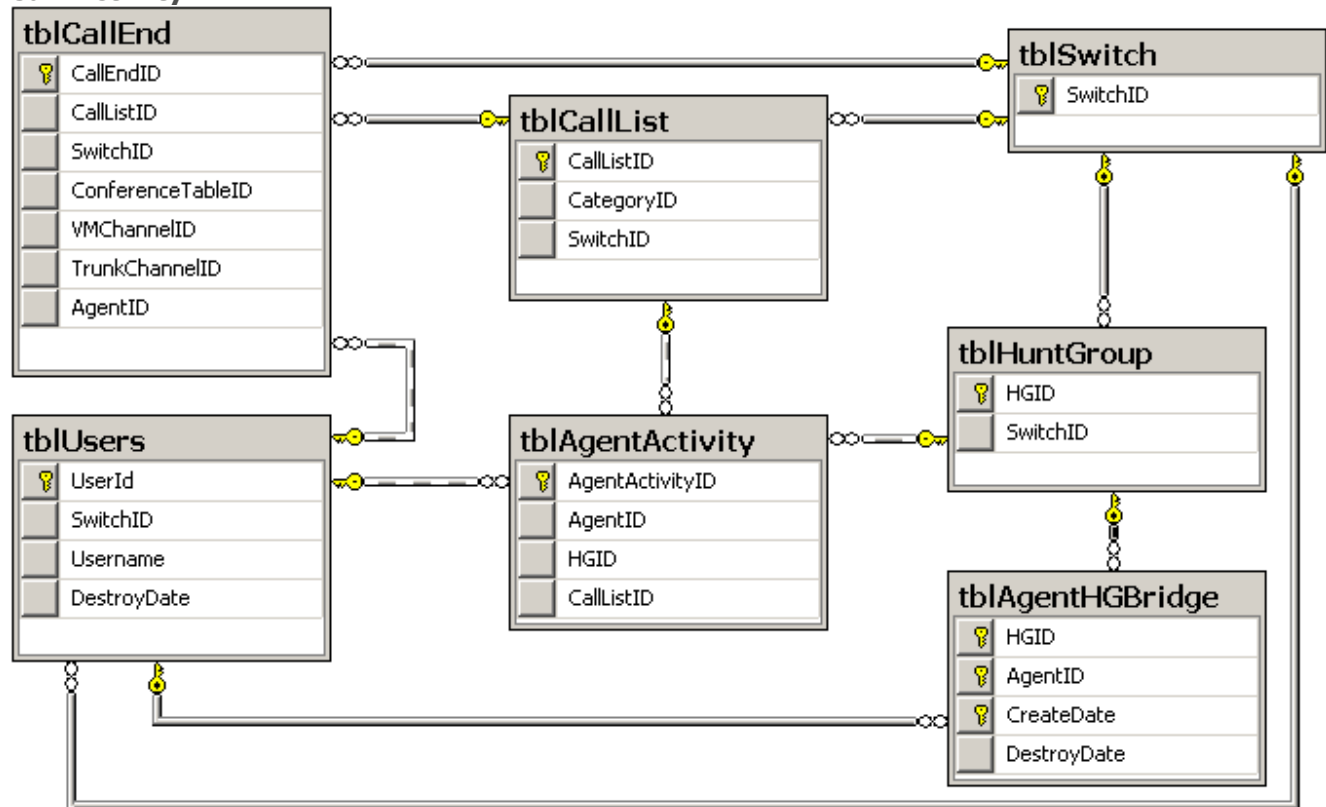

IP Office Customer Call Reporter Database Call Data Section

Reporting

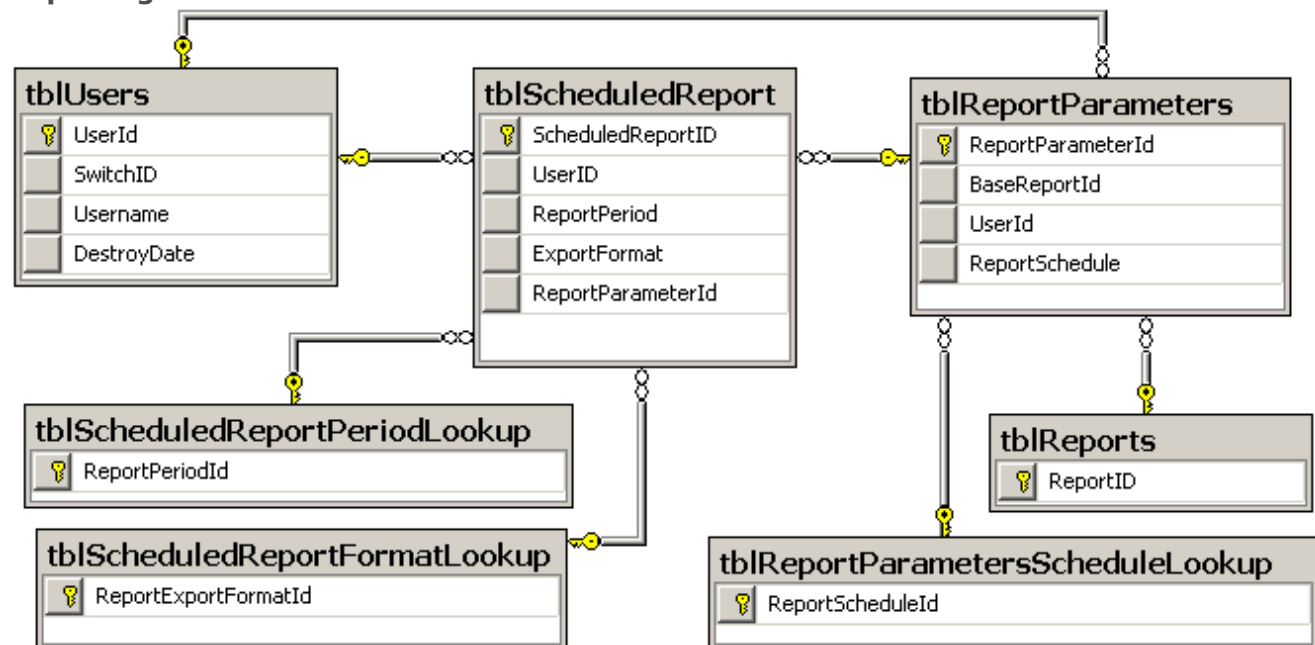

IP Office Customer Call Reporter Database Reporting Section

2.1.1 tblAgentActivity

Column	Data Type	Length	Nullable	Identity	Remarks
AgentActivityID	bigint	8	No	Yes (1,1)	Primary Key for the table.
AgentID	int	4	No	No	Identification of Agent. Get name from tblUsers [22] for AgentID = UserID. Foreign key to tblUsers (Disabled)
HGID	int	4	No	No	Get Hunt Group / Queue description from tblHuntgroup [20]. Foreign key to tblHuntGroup (Disabled)
ReasonCode	nvarchar	8000	Yes	No	Applicable only for ActivityID = 4 [24] (Busy not Available). Values are available and configurable using IP Office Manager (System CCR).
ReasonDescription	nvarchar	8000	Yes	No	Description of Reason Code as configured in IP Office Manager (System CCR).
ActivityID	smallint	2	No	No	See Activity ID [24] lookup.
StartDate	datetime	8	No	No	Initiation Timestamp of the Activity.
EndDate	datetime	8	Yes	No	Completion Timestamp of the Activity.
CallListID	bigint	8	No	No	"-1" for non call activity (e.g. log in / log out, BNA, etc) and Unique CallListID for call related activities. tblCallList can be JOINed based on CallListID to get further details about the call. Foreign key to tblCallList (Disabled)
IsForced	bit	1	No	No	Not currently used.
SupervisorID	int	4	No	No	Not currently used.
IsModified	bit	1	No	No	Not currently used.
NumberDialed	nvarchar	8000	Yes	No	If the activity is call related and the user dialed a number, this field will be populated.
CallTargetIndex	smallint	2	Yes	No	This is the index of the agent to which call is targeted. This index can change after an event. Example: Huntgroup has 2 agents: Agent1 and Agent2. When the call is presented to the first agent, CallTargetIndex will be 1. If the call is refused by Agent1 and presented to agent2, then CallTargetIndex will be shown as 2.
CallInformationAction	smallint	2	Yes	No	This bit shows the reason for picking the call by an agent. For example, if it is call pickup or connected due to unheld or unpark. Only following bits are valid. The rest of the bits are not useful for statistics calculations. <ul style="list-style-type: none"> • Connected = 1 • ConnectedDueToPickUp = 2 • ConnectedDueToUnpark = 3 • ConnectedDueToUnHeld = 4 • ConnectedPostTransfer = 5 • Dialed = 14

2.1.2 tblAgentHGBridge

Column	Data Type	Length	Nullable	Identity	Remarks
HGID	int	4	No	No	Primary Key for the table. Hunt group ID. Foreign key to tblHuntGroup [20]
AgentID	int	4	No	No	Primary Key for the table. Agent ID / UserID. Foreign key to tblUsers [22]
CreateDate	datetime	8	No	No	Primary Key for the table. Timestamp when Agent became the member of the Hunt group.
DestroyDate	datetime	8	Yes	No	Timestamp when Agent's membership with the hunt group was cancelled.
IsModified	bit	1	No	No	Not currently used.

2.1.3 tblCallList

Column	Data Type	Length	Nullable	Identity	Remarks
CallListID	bigint	8	No	Yes (1,1)	Primary Key for the table. Unique ID for a Call.
CategoryID	smallint	2	No	No	Determines the direction of call. Reference table tblCategoryLookUp [24]. Foreign key to tblCategoryLookup
SwitchID	int	4	No	No	Stores the Switch / IPOffice ID. Foreign key to tblSwitch [22].
CampaignID	int	4	No	No	Intended for future use especially with Outbound campaigns.
NumberDialled	nvarchar	8000	Yes	No	Set to Dialed number. This is the number dialed by user where as DDI is the equivalent number assigned by the switch e.g. 8035001 is the number dialed once IPO determines the short code and sends it over SIP like DDI becomes 5001@xxx.xxx.xxx.xxx. That said it is likely to be NULL for inbound calls.
DDI	nvarchar	8000	Yes	No	Dialed number.
CLI	nvarchar	8000	Yes	No	Calling number.
CallerName	nvarchar	8000	Yes	No	Initiating Agent Name
ConnectedID	nvarchar	8000	No	No	Not currently used.
CallID	int	4	No	No	CallID for switch. It is displayed as Reference number in the Call Details report. This ID resets to 1 in certain reboot scenarios of IP Office.
DigitsToCO	nvarchar	8000	Yes	No	Not currently used.
IsCallRecorded	bit	1	No	No	Intended for future use especially with Call Recording.
CreateDate	datetime	8	No	No	If a queue call is not answered by auto-attendant, then the timestamp provides the initiating time which should be referred for calculating Average Abandon time or Average Speed to Answer time.
DestroyDate	datetime	8	Yes	No	Call destruction time.
IsBroken	bit	1	No	No	If a call is cleared in a held state, the isBroken flag is set on the call list. This indicates that a caller hung up while being held. It is difficult to verify the accuracy of this field.
CallbackRequested	bit	1	No	No	Not currently used.
CallCharge	decimal	17	No	No	Not currently used.
IsModified	bit	1	No	No	Not currently used.
IsTransferSetup	bit	1	No	No	Is set for Enquiry Call.
TransferredCallListID	bigint	8	No	No	If this is a transfer setup call, it would specify the call unique identifier [calllistUid] of the call it is trying to transfer.

2.1.4 tblCallEnd

Column	Data Type	Len	Null able	Identity	Remarks
CallEndID	bigint	8	No	Yes (1,1)	Primary Key to tblCallEnd
CallListID	bigint	8	No	No	ForeignKey for tblCallList, Unique ID to identify a Call. Foreign key to tblCallList
SwitchID	int	4	No	No	Stores the Switch / IPOffice ID. Foreign key to tblSwitch
IEndFlag	bit	1	No	No	The IEndFlag stands for Initiating End. In the case of an incoming call, the trunk will be the initiating end and will be on the A side. In the case of an outgoing call the Agent is the initiating party and the trunk is the receiving party.
CreateDate	datetime	8	No	No	Time stamp when this call end was created.
DestroyDate	datetime	8	Yes	No	It is the timestamp for the destroyDate of a state. For clearing state, DestroyDate would be always set. For connected state, it will be null.
IsVoicemail	bit	1	No	No	Set when a call is directed from auto attendant(along with IsAnswered) or routed to voicemail (along with IsAnswered and IsVMAnswered).
IsOverflowed	bit	1	No	No	Once the call overflows, this flag is set and will remain set. For overflow lost, IsLost is set and for overflow answered, IsAnswered is set.
OverflowedFromHGID	int	4	No	No	HuntGroupID from which the call overflows.
IsTwinned	bit	1	No	No	Not currently used.
IsManualTransfer	bit	1	No	No	It is set when call is transferred (both supervised and unsupervised). It is set for connected and clearing state in case call is answered. For Lost and Transferred calls, it is set in clearing state. This flag is set for HGID or AgentID as recipient of transfer call. TransferFromHGID and TransferFromAgentID can be used to obtain HGID and agentID who transferred the call.
IsAutoTransfer	bit	1	No	No	It is set for Unsupervised transfer but not used by reporting
IsManualForward	bit	1	No	No	Not currently used.
IsAutoForward	bit	1	No	No	Not currently used.
IsAnswered	bit	1	No	No	Set whenever an end answers a call. It is set when a call is overflowed answered (along with IsOverflowed), when a call is routed to voicemail (along with IsVoicemail and IsVMAnswered), and when a call is directed to auto-attendant (along with IsVoicemail).
IsRefused	bit	1	No	No	Set when call is refused by Agent. When a call is not being answered by an agent within the "No answer time" then this flag get set.
IsMissed	bit	1	No	No	Set when an agent to agent call is lost. It will also be set when an outgoing call is terminated by an agent without being answered by the OutBound End.
IsLost	bit	1	No	No	Set when a call is lost.
IsHGCall	bit	1	No	No	Set for Queue calls.
ConferenceTableID	int	4	No	No	Not currently used. Foreign key to tblConference (Disabled)
VMChannelID	smallint	2	Yes	No	Indicates the voicemail device connected to the call. (You can get available VM channels from tblVoicemailGroup). Foreign key to tblVoicemailChannel (Disabled).
TrunkChannelID	smallint	2	Yes	No	Indicates the trunk device connected to the call. (You can get available trunk channels from tblTrunkGroup). Foreign key to tblTrunkChannel. (Disabled)
HGID	int	4	Yes	No	Set to HuntGroupID. Should not be 0 for Queue calls. JOIN tblHuntGroup to get Huntgroup details.
AgentID	int	4	Yes	No	Set to AgentID. JOIN tblUsers on AgentID = UserID to get Agent details. Foreign key to tblUsers (Disabled)
ExtensionID	int	4	Yes	No	Not currently used.
AccountCode	nvarchar	8000	Yes	No	Column used for GroupBy in reports and target as AccountCode.
IsModified	bit	1	No	No	Not currently used.
StateId	smallint	2	Yes	No	See State ID lookup.

Column	Data Type	Len	Null able	Identity	Remarks
CallEndWaterMark	int	4	Yes	No	Contains internal information for IP Office Customer Call Reporter.
ParkSlot	nvarchar	8000	Yes	No	Park Slot where call is parked.
StateCreateDate	datetime	8	Yes	No	TimeStamp for the corresponding stateID.
VoicemailAnnotation	nvarchar	8000	Yes	No	Stores IVR annotation information. Refers to label from VM module.
Tag	nvarchar	8000	Yes	No	Reserved for future releases.
IsVMAnswered	bit	1	No	No	Set when call is routed to VoiceMail. AgentID should be zero when IsAnswered, IsVoiceMail or IsVMAnswered is set.
IsVMLost	bit	1	No	No	Set when call is lost at VoiceMail.
IsAnsweredOther	bit	1	No	No	Is set when call is answered via call pickup etc. IsAnswered is also set.
FirstAnswered	bit	1	No	No	Set when IsAnswered is set for the first time
FirstTransfer	bit	1	No	No	Indicates that the IsManualTransfer has been set for the first time
OriginalHGID	int	4	Yes	No	First HGID set. Used to identify which was the originalHGID from which the call overflowed. Used when call overflows multiple number of times.
TransferFromAgentID	int	4	Yes	No	AgentID who initiated the transfer for call.
TransferFromHGID	int	4	Yes	No	HGID which initiated the transfer for the call.
VoicemailAgentID	int	4	Yes	No	Set if the call is routed to voicemail by an agent. If Voicemail is on for a user in IP Office Manager configuration, VoicemailAgentID is set to 0 for Queue calls routing to voicemail.
FirstOverflow	bit	1	No	No	Set when call is overflowed for the first time.
IsOverflowing	bit	1	No	No	Set when the call is overflowing. For this record, none of the other flag should be set. For next record, HGID must be set to the Queue to which the call overflows.
OverflowingToHGID	int	4	Yes	No	It is updated with the HuntGroupID to where the call overflows.
TransferToNumber	nvarchar	8000	Yes	No	Set to number to which the call is transferred.
IsRoutingToVoicemail	bit	1	No	No	Set when an end changes from agent or hunt group, it just indicates that the next end will have a voicemail id.
IsTrunkToTrunk	bit	1	No	No	It is set when call from Trunk to Agent (or queue) is transferred to a trunk.
QueueStartTime	datetime	8	Yes	No	The time when this call end entered a queue. The accuracy of this field cannot be verified as it is not used.
FrontEndedByVoicemail	bit	1	No	No	Set when a call is received at auto-attendant first and then routed to Queue or Agent (as per call scenario). It is used to get initiating event for calculation of Average speed to answer or Average Abandon time.
TransferReturn	bit	1	No	No	Set when call is answered after the transfer return that is set in IP Office manager expires. It is only set for connected state.
TransferReturnHGID	int	4	Yes	No	The transfer return hunt group identifier indicates the hunt group where the transfer return has come from.
OverflowIndex	int	4	Yes	No	When a call is marked as overflowing, an index will be placed against the call. When the call is answered, lost or routed to voicemail, the index provided at the first overflowing point will be provided.
TransferIndex	int	4	Yes	No	When a call is put on hold, an index will be put against the call. When the call is answered, lost or routed to voicemail, the index provided at hold time will be provided.

2.1.5 tblHuntGroup

Column	Data Type	Len	Nullable	Identity	Remarks
HGID	int	4	No	Yes (1,1)	Primary Key for the table. Unique ID for a Hunt Group / Queue.
SwitchID	int	4	No	No	IP Office ID. Foreign key to tblSwitch [22].
Name	nvarchar	8000	No	No	Hunt group / Queue description.
Extension	nvarchar	8000	No	No	Hunt group extension number. Populated from IP Office Manager.
CreateDate	datetime	8	No	No	Timestamp when Hunt group is created.
DestroyDate	datetime	8	Yes	No	Timestamp when a Hunt group is removed.
IsModified	bit	1	No	No	Not currently used.

2.1.6 tblReportParameters

Column	Data Type	Length	Nullable	Identity	Remarks
ReportParameterId	int	4	No	Yes (1,1)	Primary Key for the table.
BaseReportId	smallint	2	No	No	Refers to the basic reports. Foreign key to tblReports [21].
SavedReportName	nvarchar	8000	Yes	No	User defined name for the saved report.
LastRunDate	datetime	8	Yes	No	Timestamp when last executed.
NextRunDate	datetime	8	Yes	No	Timestamp for next scheduled execution.
LastModifiedDate	datetime	8	No	No	Timestamp when last update made.
StartDate	datetime	8	No	No	Report Period Start Date.
EndDate	datetime	8	No	No	Report Period End Date.
StartTime	nvarchar	8000	No	No	Report Period Start Time.
EndTime	nvarchar	8000	No	No	Report Period End Time.
TargetId	int	4	No	No	See Target ID lookup.
GroupId	int	4	No	No	See Group ID lookup.
FilterId	int	4	No	No	See Filter ID lookup.
UserId	int	4	No	No	User who scheduled the report. Foreign key to tblUsers [22].
ReportSchedule	smallint	2	No	No	Stores information about how the report is scheduled. Foreign key to tblReportParametersScheduleLookup [20].
IncludeInternal	bit	1	No	No	Flag to indicate internal call.
IncludeSaturdays	bit	1	No	No	Flag to indicate Saturday.
IncludeSundays	bit	1	No	No	Flag to indicate Sunday.
TargetValue	nvarchar	8000	No	No	Target value specified for the report.
ReportLanguage	nchar	8000	Yes	No	Report language option selected.
GraphReportOptions	nchar	8000	Yes	No	Not currently used.
ASAThreshold	int	4	Yes	No	Average Answer Time Threshold applicable for Call Summary Report only. Not currently used.
LostCallThreshold	int	4	Yes	No	Lost Call Threshold applicable for Call Summary Report only. Not currently used.
MinTalkTreshold	int	4	Yes	No	Threshold for APF calculations. Not currently used.
MaxTalkTreshold	int	4	Yes	No	Threshold for APF calculations. Not currently used.
CustomReportName	nvarchar	8000	Yes	No	Name given to a custom report.
CCRVersion	nvarchar	8000	No	No	Last CCR version in which a database schema change was made.

2.1.7 tblReportParametersScheduleLookup

Column	Data Type	Length	Nullable	Identity	Remarks
ReportScheduleId	smallint	2	No	No	Primary Key for the table.
ReportScheduleName	varchar	8000	No	No	Schedule description.

2.1.8 tblReports

Column	Data Type	Len	Nullable	Identity	Remarks
ReportID	smallint	2	No	No	Primary Key, referenced by BaseReportId of tblReportParameters 20.
ReportTitle	nvarchar	8000	No	No	Resource key for report name, as rendered in web client, typically prefixed by DB5_.
ReportKey	char	8000	No	No	Not currently used.
ReportTemplateName	nvarchar	8000	No	No	Name of the Crystal Report .rpt file

2.1.9 tblScheduledReport

Column	Data Type	Length	Nullable	Identity	Remarks
ScheduledReportID	int	4	No	Yes (1,1)	Primary Key for the table.
UserID	int	4	No	No	UserID who scheduled the report. Foreign key to tblUsers 22.
Frequency	smallint	2	Yes	No	1=Daily, 2=Weekly, 3=Monthly, 4=Unscheduled (currently no database lookup table).
ReportPeriod	smallint	2	No	No	Relates how the report will be scheduled like Daily, Weekly etc. Refer tblScheduledReportPeriodLookup 21. Foreign key to tblScheduledReportPeriodLookup
ReportPeriodCount	smallint	2	No	No	Report content set during report saving.
StartTime	nvarchar	8000	Yes	No	Time when the task will be started.
PrinterName	nvarchar	8000	Yes	No	Name of the Printer where the report will be printed.
EmailList	nvarchar	8000	Yes	No	Email ID where exported report will be mailed.
ExportFormat	smallint	2	No	No	Format to export the report. Refer tblScheduledReportFormatLookup 21. Foreign key to tblScheduledReportFormatLookup
PrintNoOfCopies	smallint	2	Yes	No	Number of copies of report.
WeeklyDayOfWeek	smallint	2	No	No	If scheduled weekly, specific day of week to execute, 0=Sunday to 6=Saturday.
MonthlyOption	smallint	2	No	No	If scheduled monthly, 1=Specific day of month by date, 2=Specific day based on days and weeks in month, e.g. 3rd Tuesday of month.
MonthlyDayOfMonth	smallint	2	No	No	If scheduled monthly, specific day of month to execute, date-1, e.g. 20th = 19.
MonthlyOccurrence	smallint	2	No	No	If scheduled monthly, based on days and weeks in month, 0=First, 1=Second, 2=Third, 3=Fourth, 4=Last.
MonthlyDayOfWeek	smallint	2	No	No	If scheduled monthly, based on days and weeks in month, 0=Sunday to 6=Saturday.
ReportParameterId	int	4	No	No	Stores the parameters saved for the report. Foreign key to tblReportParameters.
DailyIncludesWeekend	bit	1	No	No	Includes weekend or not for daily reports.
IncludeCurrentDay	bit	1	No	No	Includes current day in scheduled reports.

2.1.10 tblScheduledReportPeriodLookup

Column	Data Type	Length	Nullable	Identity	Remarks
ReportPeriodId	smallint	2	No	No	Primary Key for the table. Referenced in tblScheduledReport 21.
ReportPeriodName	varchar	8000	No	No	Name of Report Period e.g. Daily, Weekly, etc.

2.1.11 tblScheduledReportFormatLookup

Column	Data Type	Length	Nullable	Identity	Remarks
ReportExportFormatId	smallint	2	No	No	Primary Key for the table. Referenced in tblScheduledReport 21.
ReportExportFormatName	varchar	8000	No	No	List of the possible report export format.

2.1.12 tblSwitch

Column	Data Type	Length	Nullable	Identity	Remarks
SwitchID	int	4	No	Yes (1,1)	Primary Key for the table. Unique ID for the switch (IP Office).
FirmwareVersion	nvarchar	8000	Yes	No	IP Office Core version.
IP	nvarchar	8000	No	No	IP address of the IP Office.
Name	nvarchar	8000	Yes	No	Name of the IP Office.
LastConfigMerge	datetime	8	Yes	No	Indicates last configuration merge time. The accuracy cannot be verified.
CreateDate	datetime	8	No	No	Timestamp when the IP Office connected to the IP Office Customer Call Reporter application.
DestroyDate	datetime	8	Yes	No	Timestamp when the IP Office disconnected from IP Office Customer Call Reporter application.
MacAddressUpper	bigint	8	No	No	Specifies upper half of Switch MAC address.
MacAddressLower	bigint	8	No	No	Specifies lower half of Switch MAC address.
DAIP	nvarchar	8000	Yes	No	IP address of the server where DA (Data Analyzer) Service is running. This should be the IP address of the server where IP Office Customer Call Reporter application is installed.
SSIUserName	nvarchar	8000	No	No	Username for IP Office.
SSIPassword	nvarchar	8000	Yes	No	Password for IP Office.
DomainName	nvarchar	8000	Yes	No	Domain name of the Switch.
IsModified	bit	1	No	No	Not currently used.
StatusID	int	4	No	No	Required for IP Office Customer Call Reporter internal purpose.
LocationLatitude	float	8	No	No	Not used.
LocationLongitude	float	8	No	No	Not used.
LocationPublic	bit	1	No	No	Not used.
LocationDescription	nvarchar	8000	Yes	No	Not used.

2.1.13 tblUsers

Column	Data Type	Length	Nullable	Identity	Remarks
UserId	int	4	No	Yes (1,1)	Primary Key for the table. Unique ID for an Agent / Supervisor / Wallboard User / Admin.
SwitchID	int	4	Yes	No	IP Office ID. Foreign key to tblSwitch [22].
Username	nvarchar	8000	No	No	Name of the User (Agent, Supervisor, etc).
Password	nvarchar	8000	Yes	No	Encrypted Password for users to login into IP Office Customer Call Reporter, mainly for Supervisors, administrators, etc.
Roles	int	4	No	No	To distinguish Agent / Supervisor/ Admin etc.
FullName	nvarchar	8000	No	No	Full name of the user.
EmailID	nvarchar	8000	No	No	Mail ID for User.
Extension	nvarchar	8000	No	No	Agents extension.
CreateDate	datetime	8	No	No	Timestamp when User is created.
DestroyDate	datetime	8	Yes	No	Timestamp when User is removed.
SelfAdministrateViews	bit	1	No	No	Setting info for User Account attribute / status.
Enabled	bit	1	No	No	Setting info for User Account attribute / status.
ResetStatistics	bit	1	No	No	Setting info for User Account attribute / status.
Display	bit	1	No	No	Setting info for User Account attribute / status.
Audio	bit	1	Yes	No	Setting info for User Account attribute / status.

Column	Data Type	Length	Nullable	Identity	Remarks
HelpTooltips	bit	1	Yes	No	Setting info for User Account attribute / status.
HighlightStatistics	bit	1	No	No	Setting info for User Account attribute / status.
ForceAgentState	bit	1	No	No	This field enables set state dialog in the real time for controlling the agent state.
RecentReportsArchive Days	smallint	2	No	No	Setting info for User Account attribute / status
OpenReportsInNewWindow	bit	1	No	No	Setting info for User Account attribute / status
ShowLoggedOffAgents	bit	1	No	No	Setting info for User Account attribute / status. Not currently used.

2.1.14 Lookup Tables

Lookup tables are used to provide a mapping between human readable values and values stored in other tables. This allows the other tables to store simple numerical values rather than long strings. The meaning of the numeric value is determined by reference to the appropriate lookup table.

2.1.14.1 tblActivityLookup

Activity ID	Activity Description
1	Idle / Ready
2	Ringing / Alerting
3	Incoming
4	Busy Not Available
5	Hold
6	ACW
7	Logged Off
8	Logged In
9	Busy
10	Outgoing
11	Internal Made
12	Internal Received
13	Enable in hunt group
14	Disabled in hunt group

2.1.14.2 tblCategoryLookup

CategoryID	Description
1	Outgoing
2	Incoming
3	Internal

2.1.14.3 tblReportFilters

Report	FilterId	Description
Agent Time Card	1	All
	9	Shifts
	10	Lunch
	11	Breaks
	12	Talk Time
	13	Performance
	14	Calls
Call Details Report	1	All
	2	Answered
	3	No answer
	4	Overflowed Lost
	5	Overflowed Answered
	6	Transferred
	7	Lost Calls
	8	Routed to voicemail
	15	New Calls
	16	Holding
	17	Enquiry Answered
	18	Not Answered
19	Connected	
Call Summary Report	1	All

2.1.14.4 tblReportGroups

Report	GroupId	Description
Agent Summary Report	7	QUEUE
Agent Time Card	5	DAY
	6	WEEK
	7	AGENT
Call Details Report	1	UNGROUPED
	2	15 MINUTES
	3	30 MINUTES
	4	HOUR
	5	DAY
	6	WEEK
	7	QUEUE
	8	AGENT
	9	CLI
	10	DDI
	11	ACCOUNT CODE
Call Summary Report	1	UNGROUPED
	2	15 MINUTES
	3	30 MINUTES
	4	HOUR
	5	DAY
	6	WEEK
	7	QUEUE
	8	AGENT
	9	CLI
	10	DDI
	11	ACCOUNT CODE
Voicemail Report	1	UNGROUPED
	4	HOUR
	5	DAY
	6	WEEK
	10	DDI

2.1.14.5 tblScheduledReportPeriodLookup

StateID	Description
0	Daily
1	Weekly
2	Monthly

2.1.14.6 tblScheduledReportFormatLookup

ReportExportFormatID	Description
0	PDF
1	MS Word (Read only)
2	MS Excel (Data only)
3	Rich Text Format
4	Crystal
5	MS Word (Editable)
6	MS Excel (Data only)
7	XML

8	CSV
9	HTML
10	Text

2.1.14.7 tblReportTargets

Report	TargetId	Description
Agent Summary Report	1	Queue
	2	View
	3	Agent
Agent Time Card	3	Agent
Call Details Report	1	Queue
	2	View
	3	Agent
	4	DDI
	5	CLI
	6	Account code
Call Summary Report	1	Queue
	2	View
	3	Agent
	4	DDI
	5	CLI
	6	Account code
Trace Report	3	Agent
	5	CLI
	9	Call reference
Voicemail Report	8	Voicemail

2.1.14.8 tblStateLookup

StateID	Description
2	Connected
3	Hold
9	Seized
10	Dialing
16	Ringing
18	Queuing
19	Clearing

2.2 Stored Procedures

There are numerous Stored Procedures associated with the IP Office Customer Call Reporter database. Those can be used by the application written to create Custom Reports. Note that any modifications to these will break IP Office Customer Call Reporter functionality. These should only be used as references if new stored procedures need to be created for the custom report.

The following is a list of the stored procedures used by IP Office Customer Call Reporter. The parameters for those functions can be seen using [Management Studio](#) ^[11].

S. No.	Procedure	S. No.	Procedure
1	spAddAgent	120	spManagementServiceCreateWallboard
2	spAddAgentActivity	121	spManagementServiceCreateWallboardUser
3	spAddAgentsToHG	122	spManagementServiceDeleteHuntGroupSupervisorBridge
4	spAddAlarm	123	spManagementServiceDeleteHuntGroupView
5	spAddAlarmDetails	124	spManagementServiceDeleteSignOn
6	spAddCallEnd	125	spManagementServiceDeleteSwitch
7	spAddCallList	126	spManagementServiceDeleteTrunkGroupSupervisorBridge
8	spAddConference	127	spManagementServiceDestroyStatLookupViewBridge
9	spAddExtension	128	spManagementServiceDestroySupervisor
10	spAddExtensionsToHG	129	spManagementServiceDestroyUser
11	spAddHG	130	spManagementServiceDestroyWallboardUser
12	spAddRTRRequest	131	spManagementServiceGetActivities
13	spAddRTStat	132	spManagementServiceGetAllCSRs
14	spAddSwitch	133	spManagementServiceGetAllSignOnTimeOut
15	spAddSwitchActivity	134	spManagementServiceGetAllSignOnTimeOutRole
16	spAddSwitchWithPendingStatus	135	spManagementServiceGetAllSupervisors
17	spAddTrunkChannel	136	spManagementServiceGetAllSystemSettings
18	spAddTrunkGroup	137	spManagementServiceGetAllWallboards
19	spAddTrunkGroupBusyTime	138	spManagementServiceGetAllWallboardsUnlocked
20	spAddVMChannel	139	spManagementServiceGetAllWallboardUsers
21	spAddVMGroup	140	spManagementServiceGetCSR
22	spAddVMSelection	141	spManagementServiceGetCSRsInHuntGroup
23	spAgentSummaryReport	142	spManagementServiceGetDashboardGoal
24	spAgentSummaryReportHGEnabled	143	spManagementServiceGetDashboardPanels
25	spAgentSummaryReportHGTotals	144	spManagementServiceGetDatabaseVersion
26	spAgentSummaryReportNonHGTotals	145	spManagementServiceGetHuntGroups
27	spAgentTimeCardReport	146	spManagementServiceGetHuntGroupsForCSR
28	spAlarmReport	147	spManagementServiceGetHuntGroupsSupervisor
29	spATCRGetAvailabilityDetails	148	spManagementServiceGetHuntGroupStates
30	spATCRGetAvailabilityDuration	149	spManagementServiceGetHuntGroupsView
31	spATCRGetInboundCallStats	150	spManagementServiceGetMonitoringAlarms
32	spCallDetailReport	151	spManagementServiceGetPassword
33	spCallDetailReportForAccountCode	152	spManagementServiceGetSchemaVersion
34	spCallDetailReportForAgentORCSR	153	spManagementServiceGetSignOnTimeOut
35	spCallDetailReportForCLDDI	154	spManagementServiceGetSignOnTimeOutPerSession
36	spCallDetailReportForHuntGroup	155	spManagementServiceGetSignOnTimeOutPerUserSession
37	spCallDetailReportForView	156	spManagementServiceGetStatLookup
38	spCallSummaryReport	157	spManagementServiceGetStatLookupView
39	spCallSummaryReportForAccountCode	158	spManagementServiceGetStatParameters
40	spCallSummaryReportForCLI	159	spManagementServiceGetSuperAdmin
41	spCallSummaryReportForCSR	160	spManagementServiceGetSupervisor
42	spCallSummaryReportForDDI	161	spManagementServiceGetSupervisorViews
43	spCallSummaryReportForHuntGroup	162	spManagementServiceGetSupervisorViewSettings
44	spCallSummaryReportForView	163	spManagementServiceGetSystemSetting
45	spClearCache	164	spManagementServiceGetTimeOut
46	spClearConference	165	spManagementServiceGetTrunkGroups
47	spCustomReportsCallAnswerDuration	166	spManagementServiceGetTrunkGroupsSupervisor
48	spCustomReportsCallBasic	167	spManagementServiceGetUserBase
49	spCustomReportsCallDuration	168	spManagementServiceGetUserId
50	spCustomReportsCallHeldTime	169	spManagementServiceGetUserRoles
51	spCustomReportsCallOverflow	170	spManagementServiceGetViewSettingsHGStateThreshold

S. No.	Procedure
52	spCustomReportsCallQueueTime
53	spCustomReportsCallStatus
54	spCustomReportsCallTransfer
55	spCustomReportsQueueBasic
56	spCustomReportsQueueThresholdDependent
57	spCustomReportsQueueThresholdDependentIntervals
58	spCustomReportsQueueTimes
59	spCustomReportsSystemBasic
60	spCustomReportsSystemOutgoing
61	spCustomReportsSystemThresholdDependent
62	spCustomReportsSystemThresholdDependentIntervals
63	spCustomReportsSystemTimes
64	spCustomReportsVoicemail
65	spDatabaseMonitorDeleteAll
66	spDatabaseMonitorDeleteCallData
67	spDatabaseMonitorDeleteHuntTrunkGroupsSwitches
68	spDatabaseMonitorDeleteOldestPercentageCallData
69	spDatabaseMonitorDeleteSafe
70	spDatabaseMonitorDeleteUsersViewsReports
71	spDatabaseMonitorGetSize
72	spDatabaseMonitorMain
73	spDatabaseMonitorRebuildIndexes
74	spDeleteAlarm
75	spDeleteAlarmById
76	spDeleteMaintenance
77	spDeleteSavedReport
78	spEndAgentActivity
79	spGetActiveAgentHG
80	spGetActiveAgents
81	spGetActiveExtensionHG
82	spGetActiveExtensions
83	spGetActiveHGs
84	spGetActiveSwitches
85	spGetActiveTrunks
86	spGetActiveVMs
87	spGetAlarms
88	spGetAllLastRunTasks
89	spGetAllSupervisors
90	spGetAllSupervisorViews
91	spGetAllSwitches
92	spGetAllTargets
93	spGetCategoryLookup
94	spGetCLIs
95	spGetLastRunReports
96	spGetMaintenanceProperties
97	spGetMaintenanceTasks
98	spGetProcessId
99	spGetReportInfo
100	spGetReportParameters
101	spGetSavedReportParameters
102	spGetScheduledReports
103	spGetScheduleProperties
104	spGetStatGroupLookup
105	spGetStatLookup
106	spGetSubjects
107	spGetTargetFilterInAndLikeLiterals
108	spGetTargetFilters
109	spGetTargetList

S. No.	Procedure
171	spManagementServiceGetViewSettingsStateThreshold
172	spManagementServiceGetWallboard
173	spManagementServiceGetWallboardByUniqueID
174	spManagementServiceGetWallboardLock
175	spManagementServiceGetWallboardsSupervisor
176	spManagementServiceListAllSwitches
177	spManagementServiceResetPassword
178	spManagementServiceResetPasswordByUsername
179	spManagementServiceRollSignOn
180	spManagementServiceSetDashboardGoal
181	spManagementServiceSetDashboardPane
182	spManagementServiceSetHuntGroupSupervisorBridge
183	spManagementServiceSetHuntgroupViewBridge
184	spManagementServiceSetStatLookupViewBridge
185	spManagementServiceSetStatParameters
186	spManagementServiceSetSupervisorView
187	spManagementServiceSetSupervisorViewSettings
188	spManagementServiceSetSystemSetting
189	spManagementServiceSetTrunkGroupSupervisorBridge
190	spManagementServiceSetViewSettingsHGStateThreshold
191	spManagementServiceSetViewSettingsStateThreshold
192	spManagementServiceSetWallboardLock
193	spManagementServiceUpdateCSR
194	spManagementServiceUpdateSuperAdmin
195	spManagementServiceUpdateSupervisor
196	spManagementServiceUpdateWallboard
197	spManagementServiceVerifySuperAdmin
198	spManagementServiceVerifyWallboardUser
199	spRemoveAgent
200	spRemoveAgentsFromHG
201	spRemoveExtension
202	spRemoveExtensionsFromHG
203	spRemoveHG
204	spRemovePendingSwitch
205	spRemoveRTRequest
206	spRemoveSwitch
207	spRemoveTrunkGroup
208	spRemoveVMGroup
209	spSaveLastRunReport
210	spSaveReportParameters
211	spSaveScheduleProperties
212	spSwitchDisconnectivityDetail
213	spSystemGetAnsweredCall
214	spSystemGetLostCall
215	spSystemUpdateAnsweredCall
216	spSystemUpdateLostCall
217	spTraceReport
218	spUpdateAgentActivity
219	spUpdateAlarmDetails
220	spUpdateAlarmStatus
221	spUpdateAlarmThresholds
222	spUpdateCallList
223	spUpdateMaintenanceProperties
224	spUpdateReportParameters
225	spUpdateScheduleProperties
226	spUpdateStatValue
227	spUpdateSwitchConnection
228	spUpdateSwitchConnectionStatus

S. No.	Procedure
110	spGetViewThresholdsForHGCollection
111	spGraphReport
112	spInitializeSPIInput
113	spKillProcessId
114	spLastStatsReset
115	spListReports
116	spManagementServiceChangePassword
117	spManagementServiceCreateSignOn
118	spManagementServiceCreateSuperAdmin
119	spManagementServiceCreateSupervisor

S. No.	Procedure
229	spUpdateSwitchDetails
230	spUpdateSwitchLocation
231	spUpdateSwitchParameters
232	spUpdateSwitchWithPendingStatus
233	spVoiceMailReport
234	spWallBoardMessageAddMessage
235	spWallBoardMessageDeleteMessage
236	spWallBoardMessageGetCurrentMessages
237	spWallBoardMessageGetMessage
238	spWallBoardMessageUpdateMessage

2.3 User Defined Functions

There are numerous Functions associated with the IP Office Customer Call Reporter database. Those can be used by the custom application to create custom reports. Note that any modifications to the existing Functions will break IP Office Customer Call Reporter functionality. Existing functions should only be used as reference examples if new functions need to be created for the custom report.

Here is the list of the functions used by IP Office Customer Call Reporter (table valued and scalar valued). The source for those functions can be seen using [Management Studio](#) ^[12].

S. No.	Table Functions	S. No.	Scalar Functions
1	Split	1	udf_get_AnsTime
2	udfATCGetRefusedCountperAgent	2	udf_get_reportGeneric
3	udfATCRGetAgentData	3	udf_get_targetValue
4	udfATCRGetAvailabilityDetails	4	udfATCRGetActivityDetails
5	udfATCRGetAvailabilityDuration	5	udfDupLoginFilter
6	udfATCRGetCallStats	6	udfGetActivityDuration
7	udfATCRGetCallsWithinTalkThreshold	7	udfGetLoginDate
8	udfATCRGetInboundCallStats	8	udfGetLogOffEvent
9	udfATCRGetOutboundCallStats		
10	udfATCRGetTalkDuration		
11	udfATCRGetTransferSetupCallStats		
12	udfCDRGetAllCallDuration		
13	udfCDRGetAllCalls		
14	udfCDRGetAllCallsForAgentOrCSR		
15	udfCDRGetAllCallsForHuntGroupView		
16	udfCDRGetAnsweredCallAfterHoldForTransfer		
17	udfCDRGetAnsweredCalls		
18	udfCDRGetAnsweredDuration		
19	udfCDRGetHeldCalls		
20	udfCDRGetHeldDuration		
21	udfCDRGetLostCalls		
22	udfCDRGetMainCallView		
23	udfCDRGetMainCallViewForAccountCode		
24	udfCDRGetMainCallViewForAgentORCSR		
25	udfCDRGetMainCallViewForCLIDDI		
26	udfCDRGetMainCallViewForHuntGroups		
27	udfCDRGetMainCallViewForOverFlowedHuntGroups		
28	udfCDRGetMainCallViewForOverFlowedHuntGroups1		
29	udfCDRGetMainCallViewForOverFlowedViews		
30	udfCDRGetMainCallViewForViews		
31	udfCDRGetNewCallsForAccountCode		
32	udfCDRGetNewCallsForAgentORCSR		
33	udfCDRGetNewCallsForCLIDDI		
34	udfCDRGetNewCallsForHuntGroups		
35	udfCDRGetNewCallsForView		
36	udfCDRGetOverflowedAnsweredCalls		
37	udfCDRGetOverflowedLostCalls		
38	udfCDRGetOverflowingCalls		
39	udfCDRGetOverflowingDetails		
40	udfCDRGetQueueTime		
41	udfCDRGetRefusedCalls		
42	udfCDRGetRoutedToVMCSR		
43	udfCDRGetTransferredCalls		
44	udfCDRGetTransferredCallsForHuntGroupView		
45	udfCDRGetTransferredDetails		
46	udfCDRGetVoicemailCalls		
47	udfCSRGetAbandonTime		
48	udfCSRGetAbandonTimeForTransfer		
49	udfCSRGetAgentAnswerTimeForNonQueueCalls		
50	udfCSRGetAgentAnswerTimeForNormalQueueCalls		

S. No.	Table Functions
51	udfCSRGetAgentAnswerTimeForTransfer
52	udfCSRGetAnsweredCalls
53	udfCSRGetAnswerTimeForIVRAnswer
54	udfCSRGetAnswerTimeForIVRNoAnswer
55	udfCSRGetAnswerTimeForTransfer
56	udfCSRGetHuntGroupName
57	udfCSRGetLostCalls
58	udfCSRGetMainCallViewForAgentORCSR
59	udfCSRGetMainCallViewForCLIDDIAccountCode
60	udfCSRGetMainCallViewForHuntGroup
61	udfCSRGetMainCallViewForView
62	udfCSRGetOutgoingCalls
63	udfCSRGetOverflowedAnsweredCalls
64	udfCSRGetOverflowedLostCalls
65	udfCSRGetRefusedCalls
66	udfCSRGetTransferReturn
67	udfCSRGetUserName
68	udfCSRGetVoiceMailCalls

Chapter 3.

Example

3. Example

3.1 Development Environment

The development of the application that will mine the database can be done using any environment that provides access to the interface required to access the SQL database. If Microsoft is used, here are some useful URLs:

- **Data Development Center:** <http://msdn.microsoft.com/en-us/data/default.aspx>
- **Data Technologies Overview:** <http://msdn.microsoft.com/library/ee730344.aspx>
- **ADO.NET:** [http://msdn.microsoft.com/en-us/library/aa286484\(v=MSDN.10\).aspx](http://msdn.microsoft.com/en-us/library/aa286484(v=MSDN.10).aspx)
- **LINQ to SQL:** <http://msdn.microsoft.com/en-us/library/bb386976.aspx>

3.2 Data Calculation

The information stored in the database can be used to calculate information that is required in reports.

The following table provides some logic on how to get information from the database.

Item	Description	Implemented Logic
HG Enabled Time	The duration for which an agent is enabled in a Hunt Group.	Difference between StartDate for ActivityID = 13 (Enable In Hunt Group) & Immediate next StartDate for ActivityID = 14 (Disable in Hunt Group) / 7 (Logged Off)
Ring Time	Ring time of calls directed to the Queue. This is a hunt group specific attribute.	Difference between StartDate & EndDate for ActivityID = 2 (Ringing)
Talk Outbound	External calls only, does not include internal calls. This is a non hunt group specific attribute.	Difference between StartDate & EndDate for ActivityID = 10 (Outgoing) + Difference between StartDate & EndDate for ActivityID = 9 (Busy) for the same call
Talk Inbound	Talk time on calls answered for the queue. This can be a hunt group specific and/or non – hunt group attribute.	Difference between StartDate & EndDate for ActivityID = 12 (Internal Received) + Difference between StartDate & EndDate for ActivityID = 3 (Incoming) for the same call
Talk Internal	Talk time on call made to another internal party. This is a non hunt group specific attribute.	Difference between StartDate & EndDate for ActivityID = 11 (Internal Made)
Busy Not Available	Duration of telephone in Busy State. This is a non hunt group specific attribute.	Difference between StartDate & EndDate for ActivityID = 4 (Busy Not Available)
ACW Time	Duration for After Call Work (ACW). This is a non hunt group specific attribute.	Difference between StartDate & EndDate for ActivityID = 6 (After Call Work)
Hold Time	Holding includes park	If StartDate <> EndDate for ActivityID = 5 (Hold) then: Difference between StartDate & EndDate for ActivityID =5 (Hold) Else Difference between StartDate of ActivityID = 5 & StartDate of very next Activity after ActivityID = 5 for the same call (The next activity is ActivityID = 9 (Busy))
Off Hook Time	Includes picking up handset, dialing and ring time. For a trunk it is the time until the trunk is seized. This is a non hunt group specific attribute.	Difference between StartDate & EndDate for ActivityID = 9 (Busy)
Non Queue Time	Direct inbound call including ring time. This is a non hunt group specific attribute.	Difference between StartDate & EndDate for ActivityID = 12 (Internal Received) + Difference between StartDate & EndDate for ActivityID = 3 (Incoming) + Difference between StartDate & EndDate for ActivityID = 2 (Ringing)

3.3 Sample Code

The following sample code taken from IP Office Customer Call Reporter is used to generate the Agent Summary Report.

3.3.1 Stored Procedure

First, here are the stored procedure parameters and code for spAgentSummaryReport.

```

set ANSI_NULLS ON
set QUOTED_IDENTIFIER ON
GO

-- =====
-- Description:      Generates the agent summary report
-- =====
ALTER PROCEDURE [dbo].[spAgentSummaryReport]
    @Target nvarchar(50), --can be one of the following - CLI,DDI,Hunt
    --Group,CSR,Account Code,View
    @TargetValue nvarchar(MAX),
    @IncludeSaturday bit, --1 = include , 0 = exclude
    @IncludeSunday bit, --1 = include , 0 = exclude
    @FromDate datetime,
    @ToDate datetime,
    @StartTime smalldatetime,
    @EndTime smalldatetime,
    @SupervisorId bigint
AS
BEGIN
    SET NOCOUNT ON
    SET TRANSACTION ISOLATION LEVEL READ UNCOMMITTED
    SET DATEFIRST 7

    DECLARE @DStartTime DATETIME,@DEndTime DATETIME, @IsTimeSpanOverMidNight BIT

    -- Since these are datetime variables and we are extracting only start time and end time,
    -- sql server would append default date to these variables, i.e. Jan  1 1900.
    SET @DStartTime = CONVERT(char(5), @FromDate, 8)
    SET @DEndTime = CONVERT(char(5), @ToDate, 8)

    -- Set the timespan parameters
    SET @IsTimeSpanOverMidNight = CASE
        WHEN @DStartTime < @DEndTime THEN 0
        ELSE 1
    END

    -- The switch disconnectivity is to be shown on report template.
    -- Call the sp spSwitchDisconnectivityDetail to get the details that
    -- need to be shown on report.
    EXEC spSwitchDisconnectivityDetail @FromDate, @ToDate, @DStartTime, @DEndTime, @IsTimeSpanOverMidNight

    DECLARE @SPID varbinary(128);
    SELECT @SPID = CAST(CAST(@@SPID as varchar(10)) as varbinary(128));
    SET CONTEXT_INFO @SPID;

    SELECT @Target = LTRIM(RTRIM(@Target))
    SELECT @TargetValue = LTRIM(RTRIM(@TargetValue))

    --Create Temporary Table
    CREATE TABLE #agentSummary
    (
        AgentId bigint,
        AgentName varchar(50) COLLATE SQL_Latin1_General_CP1_CI_AS,
        HuntgroupId bigint,
        HuntgroupName varchar(50) COLLATE SQL_Latin1_General_CP1_CI_AS,
        OtherTime bigint,
        RingTime bigint,
        Outbound bigint,
        Inbound bigint,
        Internal bigint,
        BusyNotAvailableTime bigint,
        ACWTime bigint,
        HoldTime bigint,
        OffHookTime bigint,
        HGEnabled bigint
    );

    --Declare some variables
    --DECLARE @LogInTime bigint
    DECLARE @OtherTime bigint
    DECLARE @RingTime bigint
    DECLARE @Outbound bigint
    DECLARE @Inbound bigint
    DECLARE @Internal bigint
    DECLARE @BusyNotAvailableTime bigint
    DECLARE @ACWTime bigint
    DECLARE @HoldTime bigint
    DECLARE @OffHookTime bigint
    DECLARE @DaysOfWeek varchar(13);
    DECLARE @HGEnabled bigint;

    --Set Days of the week
    SET @DaysOfWeek = '2,3,4,5,6';
    IF(@IncludeSaturday=1)

```

```

SET @DaysOfWeek = @DaysOfWeek + ',7';

IF(@IncludeSunday=1)
    SET @DaysOfWeek = '1,' + @DaysOfWeek;

--Check For Wildcard
DECLARE @StarPos int;
SET @StarPos = 0;
IF (@TargetValue <> '*')
BEGIN
    SET @StarPos = CHARINDEX('*', @TargetValue)
    IF @StarPos > 0
    BEGIN
        SET @TargetValue = REPLACE(@TargetValue, '*', '%')
    END
END

--Get Agent List
--For Views
IF (@Target = 'View')
BEGIN
    --Wildcard ALL
    IF (@TargetValue = '*')
    BEGIN
        DECLARE cur CURSOR FOR
            SELECT DISTINCT AgentId, Username COLLATE SQL_Latin1_General_CP1_CI_AS,
                tblHuntgroup.HGID,
                tblHuntgroup.[Name] COLLATE SQL_Latin1_General_CP1_CI_AS,
                FullName COLLATE SQL_Latin1_General_CP1_CI_AS
        FROM tblSupervisorView
        JOIN tblHGViewBridge ON tblSupervisorView.ViewId =
            tblHGViewBridge.ViewId
        JOIN tblHuntgroup ON tblHGViewBridge.HGID = tblHuntgroup.HGID
        JOIN tblAgentHGBridge ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
        JOIN tblUsers ON tblAgentHGBridge.AgentId = tblUsers.UserId
        WHERE tblSupervisorView.DestroyDate IS NULL
            AND tblHuntgroup.DestroyDate IS NULL
            AND tblUsers.DestroyDate IS NULL
            AND (tblAgentHGBridge.DestroyDate IS NULL OR
                tblAgentHGBridge.DestroyDate > @FromDate)
            AND tblSupervisorView.SupervisorId = @SupervisorId
        ORDER BY HGID
        FOR READ ONLY;
    END
    --Wildcard with a word
    ELSE IF (@StarPos > 0)
    BEGIN
        DECLARE cur CURSOR FOR
            SELECT DISTINCT AgentId, Username COLLATE SQL_Latin1_General_CP1_CI_AS,
                tblHuntgroup.HGID,
                tblHuntgroup.[Name] COLLATE SQL_Latin1_General_CP1_CI_AS,
                FullName COLLATE SQL_Latin1_General_CP1_CI_AS
        FROM tblSupervisorView
        JOIN tblHGViewBridge ON tblSupervisorView.ViewId = tblHGViewBridge.ViewId
        JOIN tblHuntgroup ON tblHGViewBridge.HGID = tblHuntgroup.HGID
        JOIN tblAgentHGBridge ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
        JOIN tblUsers ON tblAgentHGBridge.AgentId = tblUsers.UserId
        WHERE tblSupervisorView.DestroyDate IS NULL
            AND tblHuntgroup.DestroyDate IS NULL
            AND tblUsers.DestroyDate IS NULL
            AND (tblAgentHGBridge.DestroyDate IS NULL OR
                tblAgentHGBridge.DestroyDate > @FromDate)
            AND tblSupervisorView.[Name] COLLATE SQL_Latin1_General_CP1_CI_AS
                LIKE @TargetValue
            AND tblSupervisorView.SupervisorId = @SupervisorId
        ORDER BY HGID
        FOR READ ONLY;
    END
    --Normal Values Entered
    ELSE
    BEGIN
        DECLARE cur CURSOR FOR
            SELECT DISTINCT AgentId, Username COLLATE SQL_Latin1_General_CP1_CI_AS,
                tblHuntgroup.HGID,
                tblHuntgroup.[Name] COLLATE SQL_Latin1_General_CP1_CI_AS,
                FullName COLLATE SQL_Latin1_General_CP1_CI_AS
        FROM tblSupervisorView
        JOIN tblHGViewBridge ON tblSupervisorView.ViewId = tblHGViewBridge.ViewId
        JOIN tblHuntgroup ON tblHGViewBridge.HGID = tblHuntgroup.HGID
        JOIN tblAgentHGBridge ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
        JOIN tblUsers ON tblAgentHGBridge.AgentId = tblUsers.UserId
        WHERE tblSupervisorView.DestroyDate IS NULL
            AND tblHuntgroup.DestroyDate IS NULL
            AND tblUsers.DestroyDate IS NULL
            AND (tblAgentHGBridge.DestroyDate IS NULL OR
                tblAgentHGBridge.DestroyDate > @FromDate)
            AND tblSupervisorView.[Name] COLLATE SQL_Latin1_General_CP1_CI_AS IN
                (SELECT * from split(@TargetValue, ','))
            AND tblSupervisorView.SupervisorId = @SupervisorId
        ORDER BY HGID
        FOR READ ONLY;
    END
    --For Huntgroups
    IF (@Target = 'HuntGroup')
    BEGIN
        --Wildcard ALL
        IF (@TargetValue = '*')
        BEGIN
            DECLARE cur CURSOR FOR

```

```

SELECT DISTINCT AgentId,
                Username COLLATE SQL_Latin1_General_CP1_CI_AS,
                tblHuntgroup.HGID,
                tblHuntgroup.[Name] COLLATE
                                SQL_Latin1_General_CP1_CI_AS,
                FullName COLLATE SQL_Latin1_General_CP1_CI_AS
FROM tblHuntgroup
JOIN tblAgentHGBridge ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
JOIN tblUsers ON tblAgentHGBridge.AgentId = tblUsers.UserId
WHERE tblHuntgroup.DestroyDate IS NULL
      AND tblUsers.DestroyDate IS NULL
      AND (tblAgentHGBridge.DestroyDate IS NULL OR
           tblAgentHGBridge.DestroyDate > @FromDate)
ORDER BY HGID
FOR READ ONLY;
END
--Wildcard with a word
ELSE IF (@StarPos > 0)
BEGIN
    DECLARE cur CURSOR FOR
        SELECT DISTINCT AgentId,
                        Username COLLATE SQL_Latin1_General_CP1_CI_AS,
                        tblHuntgroup.HGID,
                        tblHuntgroup.[Name] COLLATE
                                SQL_Latin1_General_CP1_CI_AS,
                        FullName COLLATE SQL_Latin1_General_CP1_CI_AS
        FROM tblHuntgroup
        JOIN tblAgentHGBridge ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
        JOIN tblUsers ON tblAgentHGBridge.AgentId = tblUsers.UserId
        WHERE tblHuntgroup.DestroyDate IS NULL
              AND tblUsers.DestroyDate IS NULL
              AND (tblAgentHGBridge.DestroyDate IS NULL OR
                   tblAgentHGBridge.DestroyDate > @FromDate)
              AND [Name] COLLATE SQL_Latin1_General_CP1_CI_AS LIKE
                  @TargetValue
        ORDER BY HGID
        FOR READ ONLY;
    END
    --Normal Values Entered
ELSE
BEGIN
    DECLARE cur CURSOR FOR
        SELECT DISTINCT AgentId,
                        Username COLLATE SQL_Latin1_General_CP1_CI_AS,
                        tblHuntgroup.HGID,
                        tblHuntgroup.[Name] COLLATE
                                SQL_Latin1_General_CP1_CI_AS,
                        FullName COLLATE SQL_Latin1_General_CP1_CI_AS
        FROM tblHuntgroup
        JOIN tblAgentHGBridge ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
        JOIN tblUsers ON tblAgentHGBridge.AgentId = tblUsers.UserId
        WHERE tblHuntgroup.DestroyDate IS NULL
              AND tblUsers.DestroyDate IS NULL
              AND (tblAgentHGBridge.DestroyDate IS NULL OR
                   tblAgentHGBridge.DestroyDate > @FromDate)
              AND [Name] COLLATE SQL_Latin1_General_CP1_CI_AS IN (SELECT *
                                                                    from split(@TargetValue , ','))
        ORDER BY HGID
        FOR READ ONLY;
    END
END
--For Agents
IF (@Target = 'CSR')
BEGIN
    --Wildcard ALL
    IF (@TargetValue = '*')
    BEGIN
        DECLARE cur CURSOR FOR
            SELECT DISTINCT AgentId, Username, tblHuntgroup.HGID,
                            tblHuntgroup.[Name],
                            FullName COLLATE SQL_Latin1_General_CP1_CI_AS
            FROM tblUsers
            JOIN tblAgentHGBridge ON tblAgentHGBridge.AgentID = tblUsers.UserId
            JOIN tblHuntgroup ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
            WHERE tblUsers.DestroyDate IS NULL
                  AND (tblAgentHGBridge.DestroyDate IS NULL OR
                       tblAgentHGBridge.DestroyDate > @FromDate)
            ORDER BY HGID
            FOR READ ONLY;
        END
        --Wildcard with a word
    ELSE IF (@StarPos > 0)
    BEGIN
        DECLARE cur CURSOR FOR
            SELECT DISTINCT AgentId, Username, tblHuntgroup.HGID,
                            tblHuntgroup.[Name],
                            FullName COLLATE SQL_Latin1_General_CP1_CI_AS
            FROM tblUsers
            JOIN tblAgentHGBridge ON tblAgentHGBridge.AgentID = tblUsers.UserId
            JOIN tblHuntgroup ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
            WHERE UserName COLLATE SQL_Latin1_General_CP1_CI_AS LIKE
                  @TargetValue
                  AND tblUsers.DestroyDate IS NULL
                  AND (tblAgentHGBridge.DestroyDate IS NULL OR
                       tblAgentHGBridge.DestroyDate > @FromDate)
            ORDER BY HGID
            FOR READ ONLY;
        END
    END
    --Normal Values Entered

```

```

ELSE
BEGIN
    DECLARE cur CURSOR FOR
        SELECT DISTINCT AgentId, Username, tblHuntgroup.HGID,
            tblHuntgroup.[Name],
            FullName COLLATE SQL_Latin1_General_CP1_CI_AS
        FROM tblUsers
            JOIN tblAgentHGBridge ON tblAgentHGBridge.AgentID = tblUsers.UserID
            JOIN tblHuntgroup ON tblHuntgroup.HGID = tblAgentHGBridge.HGID
            WHERE UserName COLLATE SQL_Latin1_General_CP1_CI_AS IN (SELECT *
from split(@TargetValue , ','))
            AND tblUsers.DestroyDate IS NULL
            AND (tblAgentHGBridge.DestroyDate IS NULL OR
tblAgentHGBridge.DestroyDate > @FromDate)
        ORDER BY HGID
        FOR READ ONLY;
    END
END

OPEN cur;

--Loop through all agents
DECLARE @AgentId bigint;
DECLARE @HuntgroupId bigint;
DECLARE @AgentName varchar(50);
DECLARE @HuntgroupName varchar(50);
DECLARE @FullAgentName varchar(60);
DECLARE @StoreAgentId bigint;
DECLARE @StoreHuntgroupId bigint;
DECLARE @fetchStatus int;

FETCH NEXT FROM cur INTO @AgentId, @AgentName, @HuntgroupId, @HuntgroupName,
                        @FullAgentName;
SET @fetchStatus = @@FETCH_STATUS;

--Loop through all agents
WHILE (0 = 0)
BEGIN
    SET @StoreAgentId = @AgentId;
    SET @StoreHuntgroupId = @HuntgroupId;
    --Loop per huntgroup
    WHILE (@StoreAgentId = @AgentId AND @fetchStatus = 0)
    BEGIN
        --Initialise the variables
        SET @OtherTime = 0;
        SET @RingTime = 0;
        SET @Outbound = 0;
        SET @Inbound = 0;
        SET @Internal = 0;
        SET @BusyNotAvailableTime = 0;
        SET @ACWTime = 0;
        SET @HoldTime = 0;
        SET @OffHookTime = 0;
        SET @HGEnabled = 0;

        --Get Huntgroup Enabled
        EXEC dbo.spAgentSummaryReportHGEnabled @AgentId, @HuntgroupId,
                                                @FromDate, @ToDate, @DaysOfWeek,
                                                @HGEnabled OUTPUT, 0;

        --Get Huntgroup Related Totals
        EXEC dbo.spAgentSummaryReportHGTotals @AgentId, @HuntgroupId,
                                                @FromDate, @ToDate, @DaysOfWeek,
                                                @HoldTime OUTPUT,
                                                @RingTime OUTPUT,
                                                @Inbound OUTPUT;

        EXEC dbo.spAgentSummaryReportNonHGTotals @StoreAgentId, @FromDate,
                                                @ToDate, @DaysOfWeek,
                                                @Outbound OUTPUT,
                                                @BusyNotAvailableTime OUTPUT,
                                                @ACWTime OUTPUT,
                                                @HoldTime OUTPUT,
                                                @OffHookTime OUTPUT,
                                                @Internal OUTPUT,
                                                @OtherTime OUTPUT

        --Setup Initial Agent In Temporary Table
        INSERT INTO #agentSummary
        VALUES (
            @AgentId,
                @FullAgentName,
            @HuntgroupId,
            @HuntgroupName,
            @OtherTime,
            @RingTime,
            @Outbound,
            @Inbound,
            @Internal,
            @BusyNotAvailableTime,
            @ACWTime,
            @HoldTime,
            @OffHookTime,
            @HGEnabled
        );

        FETCH NEXT FROM cur INTO @AgentId, @AgentName, @HuntgroupId,
            @HuntgroupName, @FullAgentName;
        SET @fetchStatus = @@FETCH_STATUS;
    END
END

```



```
        IF (@fetchStatus <> 0)
            BREAK;
    END

    SELECT * FROM #agentSummary ORDER BY HuntgroupName, AgentName;

    --Clean Up
    CLOSE cur;
    DEALLOCATE cur;
    DROP TABLE #agentSummary;
END
```

3.3.2 C# Code

The following example C# program shows how to execute the [spAgentSummaryReport](#)³⁷ stored procedure to obtain an Agent Summary Report. The parameters are set using the CSR Target for Agent Extn872, calls between 9:00 and 17:00 including Saturday and Sunday, date range from the first time calls were recorded in the database until now. The SupervisorID value is ignore for CSR targets, it is only used for Supervisor Views target.

```
using System;
using System.Data;
using System.Data.SqlClient;

namespace ConsoleApplication1
{
    class Program
    {
        static void Main()
        {
            try
            {
                SqlConnection connection = new SqlConnection("Data Source=localhost\\SQLEXPRESS;Initial
                Catalog=AvayaSBCCRT;uid=username;pwd=password");
                using (connection)
                {
                    SqlCommand command =
                        new SqlCommand("spAgentSummaryReport",
                                      connection);

                    using (command)
                    {
                        command.CommandType = CommandType.StoredProcedure;

                        SqlParameter param = command.Parameters.Add("Target",
                                                                    SqlDbType.NVarChar);
                        param.Direction = ParameterDirection.Input;
                        param.Value = "CSR";

                        param = command.Parameters.Add("TargetValue",
                                                                    SqlDbType.NVarChar);
                        param.Direction = ParameterDirection.Input;
                        param.Value = "Extn872";

                        param = command.Parameters.Add("IncludeSaturday",
                                                                    SqlDbType.Bit);
                        param.Direction = ParameterDirection.Input;
                        param.Value = true;

                        param = command.Parameters.Add("IncludeSunday",
                                                                    SqlDbType.NVarChar);
                        param.Direction = ParameterDirection.Input;
                        param.Value = true;

                        param = command.Parameters.Add("FromDate",
                                                                    SqlDbType.DateTime);
                        param.Direction = ParameterDirection.Input;
                        param.Value = DateTime.Now.AddDays(-1);

                        param = command.Parameters.Add("ToDate",
                                                                    SqlDbType.DateTime);
                        param.Direction = ParameterDirection.Input;
                        param.Value = DateTime.Now;

                        param = command.Parameters.Add("StartTime",
                                                                    SqlDbType.NVarChar);
                        param.Direction = ParameterDirection.Input;
                        param.Value = "09:00";

                        param = command.Parameters.Add("EndTime",
                                                                    SqlDbType.NVarChar);
                        param.Direction = ParameterDirection.Input;
                        param.Value = "17:00";

                        param = command.Parameters.Add("SupervisorId",
                                                                    SqlDbType.Int);
                        param.Direction = ParameterDirection.Input;
                        param.Value = 2;

                        connection.Open();

                        SqlDataReader reader = command.ExecuteReader();
                        if (null != reader)
                        {
                            using (reader)
                            {
                                while (reader.Read())
                                {
                                    for (int field = 0;
                                         field < reader.FieldCount;
                                         field++)
                                    {
                                        Console.WriteLine(reader.GetName(field)
                                                         + ": "
                                                         + reader[field]);
                                    }
                                }
                                while (reader.NextResult())
                                {
                                    Console.WriteLine(string.Empty);
                                }
                            }
                        }
                    }
                }
            }
        }
    }
}
```


Performance figures and data quoted in this document are typical, and must be specifically confirmed in writing by Avaya before they become applicable to any particular order or contract. The company reserves the right to make alterations or amendments to the detailed specifications at its discretion. The publication of information in this document does not imply freedom from patent or other protective rights of Avaya or others.

All trademarks identified by the ® or ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners.

This document contains proprietary information of Avaya and is not to be disclosed or used except in accordance with applicable agreements.

© 2013 Avaya Inc. All rights reserved.