

Grandstream Networks, Inc.

GXV3275 IP Multimedia Phone for Android™

XML Based Downloadable Phonebook Guide



GXV3275 XML Based Downloadable Phonebook Guide

Index

INTRODUCTION	3
WHAT IS XML	3
WHY XML	3
XML API ARCHITECTURE	3
XML PHONEBOOK CONFIGURATION	6
FIRMWARE.....	6
LCD CONFIGURATION.....	6
PROVISIONING.....	8
IMPORT/EXPORT PHONEBOOK.....	9
XML PHONEBOOK SYNTAX.....	14
HEADER	14
PHONEBOOK XML STRUCTURE	14
PHONEBOOK XML ELEMENT	15
<i>ROOT ELEMENT <AddressBook></i>	16
<i><pbgroup> ELEMENT</i>	16
<i><Contact> ELEMENT</i>	17
<i><Phone> ELEMENT</i>	18
XML PHONEBOOK EXAMPLE.....	19

Table of Figures
GXV3275 XML Based Downloadable Phonebook Guide

Figure 1: GXV3275 XML API via HTTP	4
Figure 2: GXV3275 XML API Structure 1	4
Figure 3: GXV3275 XML API Structure 2	5
Figure 4: Contacts->Menu.....	6
Figure 5: XML Phone Book Download	7
Figure 6: Import and Export Phone Book XML File	10
Figure 7: Import Phone Book XML File: Settings	10
Figure 8: Import Phone Book XML File: Choose File.....	11
Figure 9: Import Phone Book XML File: Import.....	11
Figure 10: Export Phone Book XML File: Settings.....	12
Figure 11: Export Phone Book XML File: Choose Directory	13
Figure 12: Export Phone Book XML File: Export	13

Table of Tables
GXV3275 XML Based Downloadable Phonebook Guide

Table 1: <AddressBook> Element.....	16
Table 2: <pbgroup> Element.....	16
Table 3: <Contact> Element.....	17
Table 4: <Phone> Element.....	18

INTRODUCTION

The Grandstream GXV3275 supports XML based downloadable phone book for users to share and maintain a phone book remotely with ease. Besides directly importing vcard/csv format contacts, loading contacts from synced-up accounts and manually editing from LCD, the GXV3275 offers this XML API as a user-friendly download method via the phone's LCD and web UI.

For the ease of efficient deployment and management, the XML phone book file could be stored on a web server for the phones to download. There are also applications that require a centralized directory server and have all phones synchronized with the server periodically.

This document specifies the Grandstream XML based downloadable phone book configuration that will be applied to GXV3275 firmware version 1.0.1.20 or newer. An example XML phone book file is provided at the end of this guide. Users could start a phone book by adding contacts to the example file or exporting the existed phone book file from phone's LCD.

WHAT IS XML

XML (eXtensible Markup Language) is a markup language* for documents and applications containing structured information. This information contains both content (text, pictures, input box and etc.) and an indication of what role that content plays (e.g. contents in a section header is different from contents in a footnote). Almost all documents are structured.*

*A markup language is a mechanism to identify structures in a document. The XML specification defines a standard way to add markup to documents.

WHY XML

What benefits does XML provide to SIP endpoints? XML enables our SIP phones to serve as output devices and allows the phones to interact with external applications in a flexible and programmable manner.

XML API ARCHITECTURE

The XML based phone book downloading for the GXV3275 could use HTTP or TFTP as the transport protocol. The following figure shows how it works via HTTP as an example. First, the GXV3275 initiates the HTTP GET Request to the HTTP server and waits for the response. Once the phone receives the

response with XML content in BODY, it displays the information.

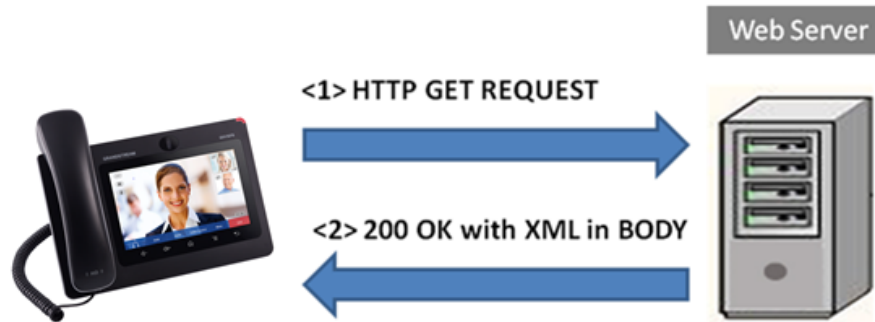


Figure 1: GXV3275 XML API via HTTP

Two types of XML API architecture are introduced below, depending on whether the transaction is via LAN or Internet.

1. A transaction in the LAN may exchange information in the following manner. The GXV3275 sends a request to the web server via HTTP/TFTP and waits for a response with the XML contents. The web server will handle the request and communicate with the application server to get the information for the XML phone book content display. The following figure shows downloading XML phone book file via HTTP within a LAN.

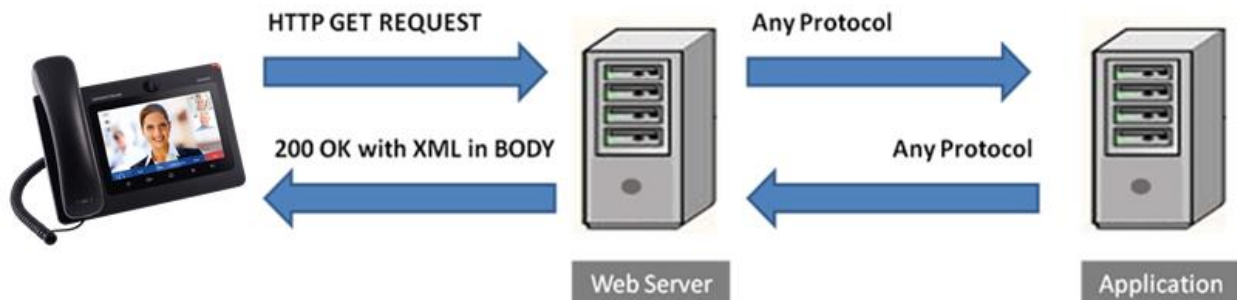


Figure 2: GXV3275 XML API Structure 1

2. If the above Web Server accesses Internet, it could interact with outside web server and respond with real-time content to the GXV3275.

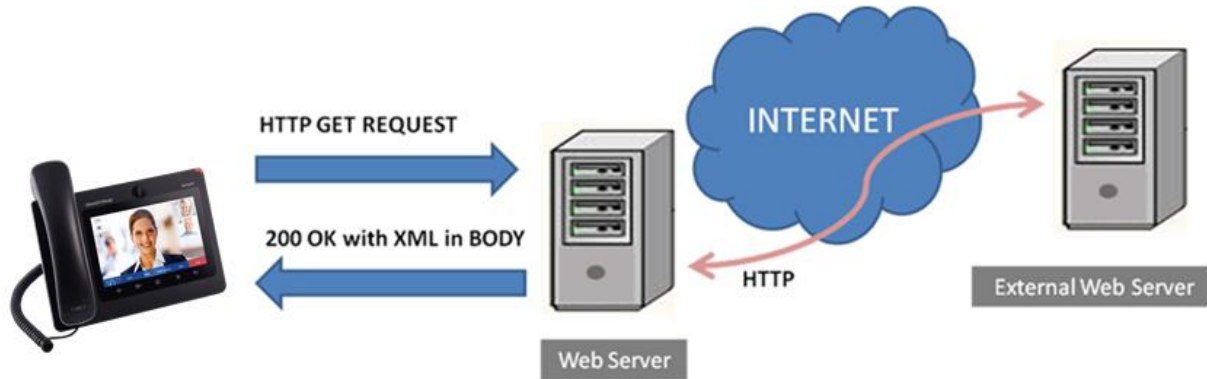


Figure 3: GXV3275 XML API Structure 2

As illustrated above, all the logic lies within the server side of the architecture. The GXV3275 phone just receives the XML documents and displays it accordingly.

XML PHONEBOOK CONFIGURATION

FIRMWARE

Before the XML phone book is used on GXV3275, please make sure the firmware on the phone is upgraded to the latest version. Please refer to the following link for firmware upgrading information:

<http://www.grandstream.com/support/firmware>

LCD CONFIGURATION

To download the XML phone book file to GXV3275, go to LCD Menu->**Contacts** and tap on **Menu->Download** to open the XML Phone Book download interface.

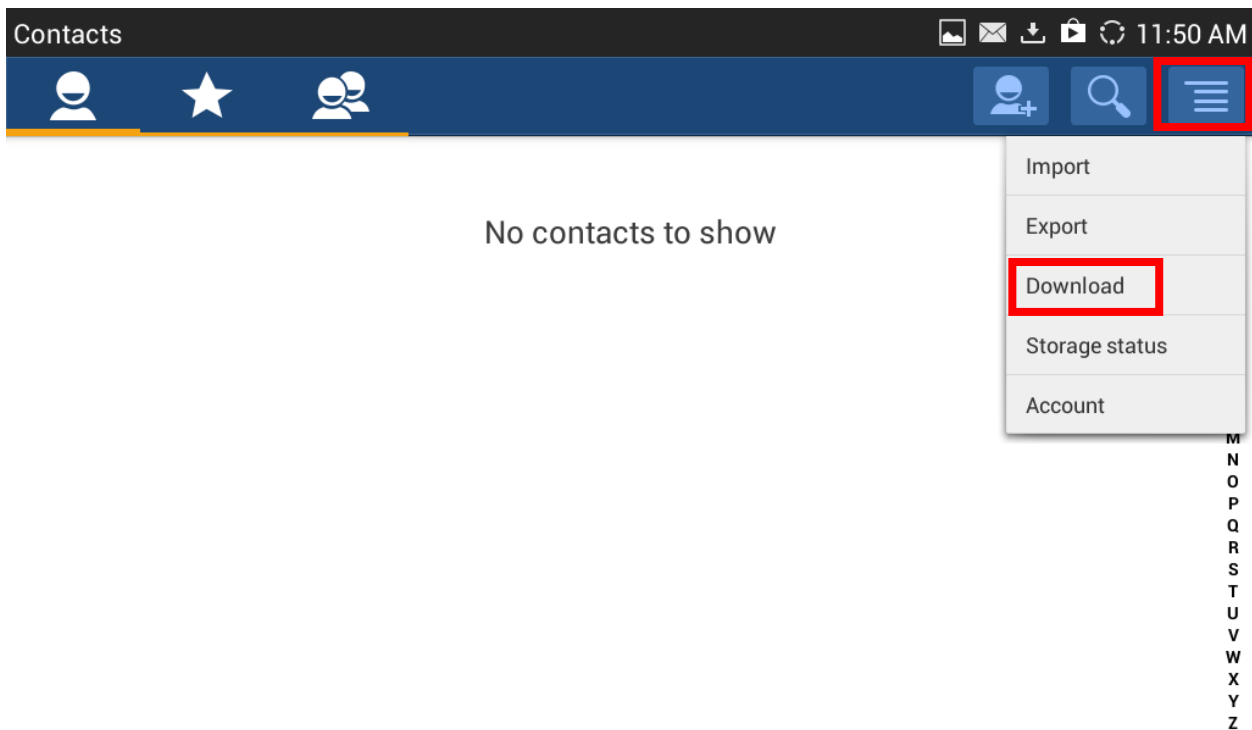








Figure 4: Contacts->Menu

Download Contacts
FTP       11:52 AM

✕ Cancel
✓ Save
↓ Download Now

Delete the history	<input type="checkbox"/> OFF
Replace duplicate entries	<input type="checkbox"/> OFF
Download mode	tftp ▲
File encoding	UTF-8 ▲
Time intervals	None ▲
Download server	192.168.40.173

Figure 5: XML Phone Book Download

- **Download Mode**
 The phone book XML file could be downloaded via HTTP or TFTP. Users could also set it to "OFF" to disable phone book download.
- **Delete the History**
 If this option is set to "ON", all the existed entries in the GXV3275 Contacts will be automatically removed when the XML phone book is downloaded to the phone. The default value is "OFF".
- **Replace duplicate entries**
 If this option is set to "ON", the duplicate entries in the Contacts will be automatically replaced with the ones in the downloaded XML phone book. The default value is "OFF".
- **File encoding**
 The encoding format for the XML phone book file. Users could select "UTF-8", "GBK" (for Chinese characters), "UTF-16", "UTF-32", "Big5", "Big5-HKSCS", "SHIFT-JIS", "ISO8859-1", "ISO8859-15", "Windows-1251" and "EUC-KR". The default value is "UTF-8".
- **Download Server**

This specifies the path where the phone is going to download the XML phone book file. Since download method is already specified in the previous selection, users do not have to provide this information in the server path. The accepted format are as follows:

IP_address[:port]/dir

Hostname[:port]/dir

Examples:

192.168.40.10/XMLphonebookdir

192.168.40.10:443/XMLphonebookdir

service.mycompany.com/XML/phonebook

mycompany.com:8080/phonebook



Note:

1. If "[:port]" is not specified, port 80 will be used as default for HTTP and Port 69 will be used as default for TFTP;
2. The GXV3275 will always look for the phone book file ***phonebook.xml*** for downloading if no file name is specified in the server path. Users could also change the phone book name if desired. In this case, the phone book file name needs to be specified in the server path. For example, if the phone book file name is ***GXV3275contacts.xml*** and the server directory is ***192.168.40.10/XML***, the download server path should be ***192.168.40.10/XML/GXV3275contacts.xml***.

- **Time Interval**

This specifies the phone book automatic download time interval. The available intervals are 2 hour, 4 hour, 6 hour, 8 hour and 12 hour. If it's set to None, automatic download will be disabled.

After the above configuration, tap on "Save" to save the change. Users could tap on "Download Now" to start the downloading process.

PROVISIONING

Users may also use the config file to provision the phone with the above XML phone book downloading options. In this case, the GXV3275 needs to be rebooted and provisioned. The corresponding P values are as shown below.

- **P330:** Download Mode. Possible values: 1 (HTTP) / 2 (TFTP); other values are ignored. The default value is 0.
- **P1435:** Delete the History. Possible values: 0 (No) / 1 (Yes); other values are ignored. The default value is 0.
- **P1436:** Replace duplicate entries. Possible values: 0 (No) / 1 (Yes); other values are ignored. The default value is 0.
- **P1681:** File encoding. Possible values: UTF-8, GBK, UTF-16, UTF-32, Big5, Big5-HKSCS, SHIFT-JIS, ISO8859-1, ISO8859-15, Windows-1251, EUC-KR. The default value is UTF-8.
- **P331:** Download Server. This is a string for the path to download the phonebook.xml file. It MUST be in the host/path format.
- **P332:** Time Interval (in minutes). Possible values: 0 - "None", 120 - "2 hour", 240 - "4 hour", 360 - "6 hour", 480 - "8 hour", and 720 - "12 hour"; other values are ignored. The default value is 0 (automatic download disabled).

The phone will be set up with the P values when the provisioning routine is completed. It will attempt to download the phone book XML file specified in "Download Server" with configured interval and process it. If the "Time Interval" is set to a non-zero value, a recurring timer will be activated periodically to check the phone book file in the server and the phone will repeat this process automatically.

**Note:**

1. As you may know, it is also possible to enter the XML phone book file server path into a web browser. In this way you'll be able to see the exact XML document on your PC that your phone will be receiving.
2. The downloaded XML phone book file can be displayed but it won't be saved internally on the phone. It is recommended to save the XML phone book file externally on your PC or server for your reference and future use.

IMPORT/EXPORT PHONEBOOK

Besides downloading phone book file from remote server, users could also directly import phonebook.xml to the GXV3275 in the LCD from local storage/USB storage/SD card. If there is an existing phone book in the phone's Contacts already, users may export the file to internal storage/USB storage/SD card as well. The "Import" and "Export" settings are under LCD Menu->**Contacts->Menu**.

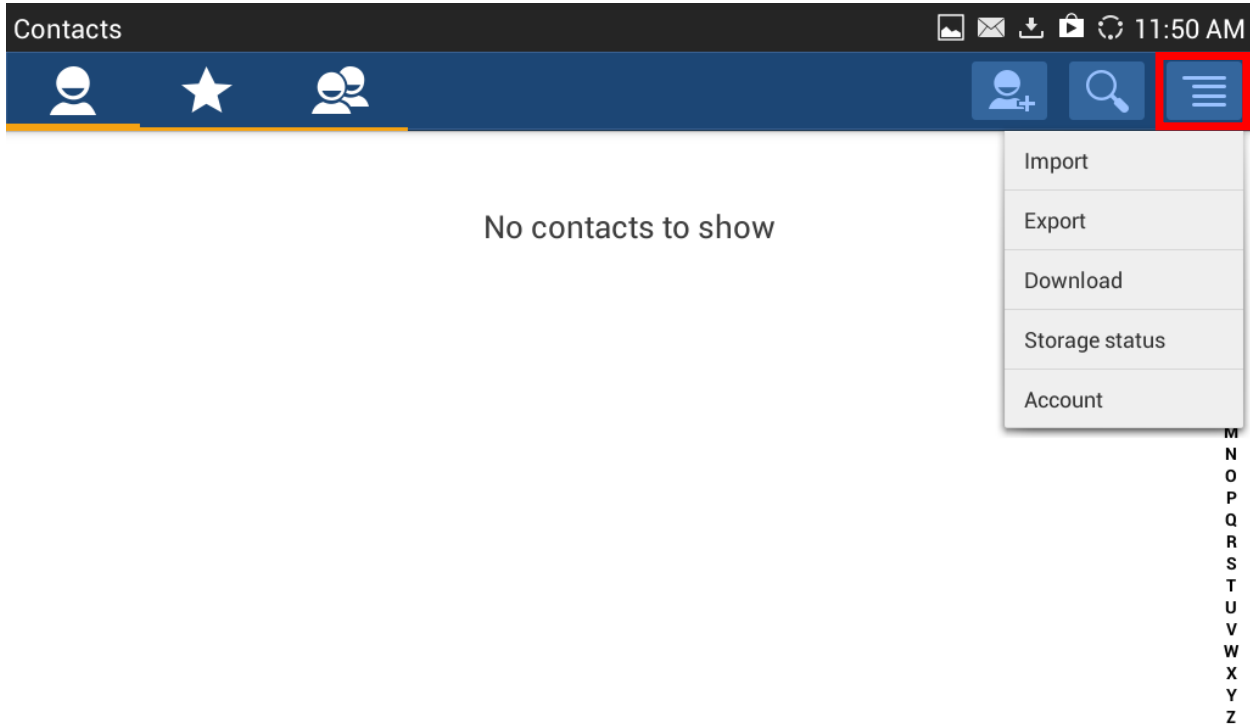


Figure 6: Import and Export Phone Book XML File

- **Import**

Tap on "Import" in **Contacts->Menu** and the following figure will show.

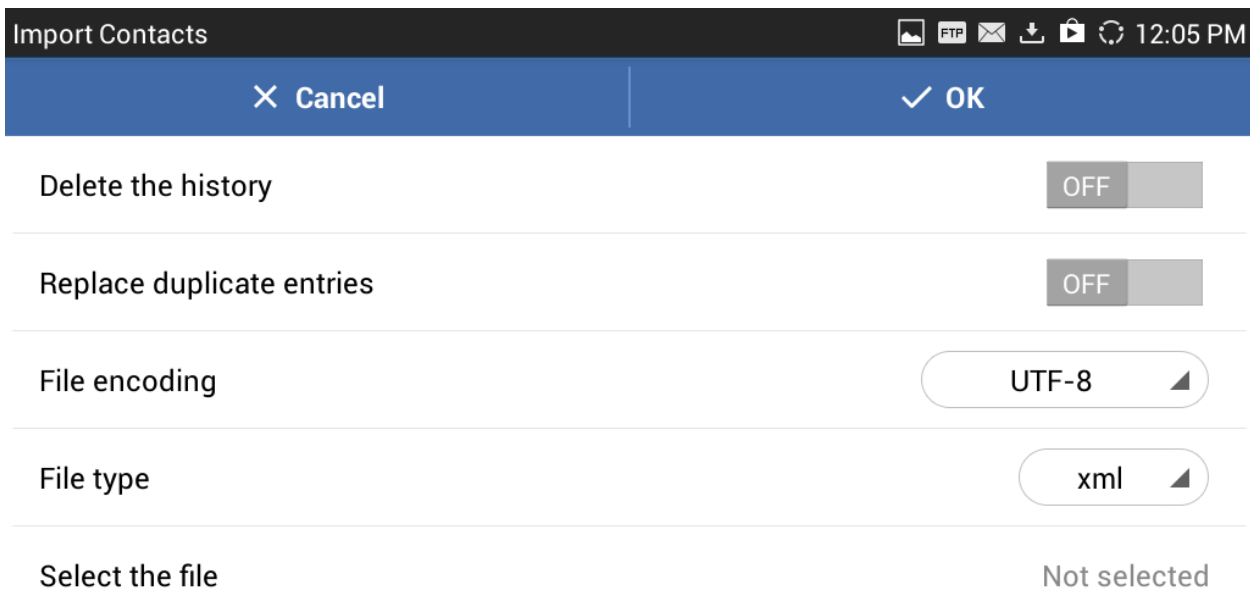


Figure 7: Import Phone Book XML File: Settings

Configure import options "Delete the History", "Replace duplicate entries", "File encoding" format and select "File Type" as "xml". Then tap on "Select the file" button to specify the path where the phonebook.xml is located in the internal storage or USB storage/SD card.

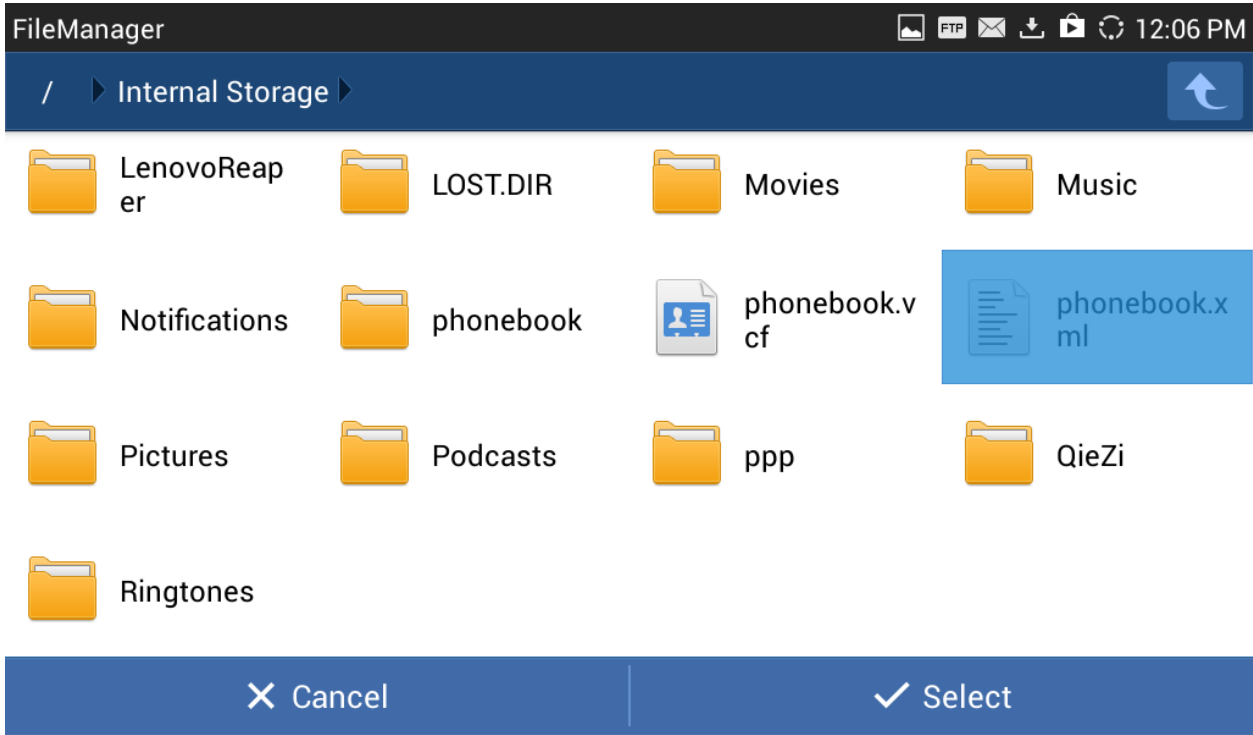


Figure 8: Import Phone Book XML File: Choose File

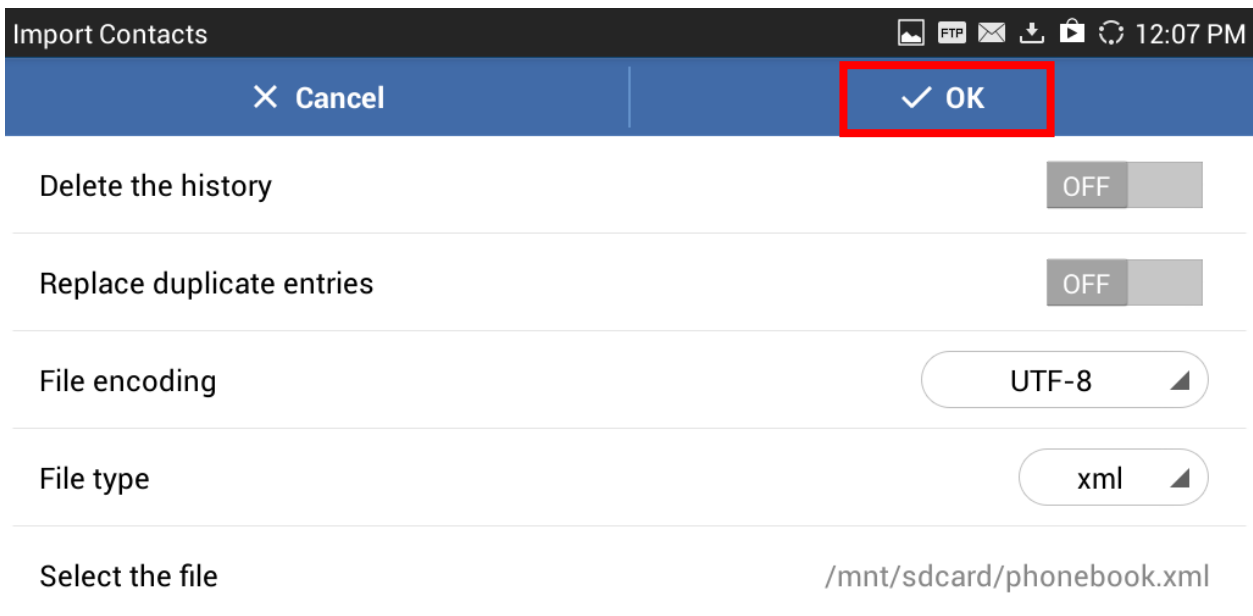


Figure 9: Import Phone Book XML File: Import

After selecting the file, tap on "OK" to start importing (see figure above).

- **Export**

Tap on "Export" in **Contacts->Menu** and the following figure will show.



Figure 10: Export Phone Book XML File: Settings

Select "File encoding" format and "File Type" as "xml". Then tap on "Choose Directory" to specify the path where the phonebook.xml will be saved.

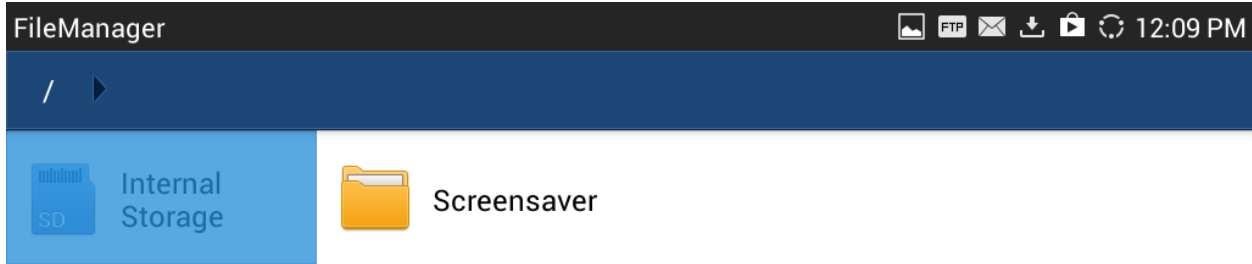


Figure 11: Export Phone Book XML File: Choose Directory

After specifying the path, tap on "OK" to start exporting (see figure below).

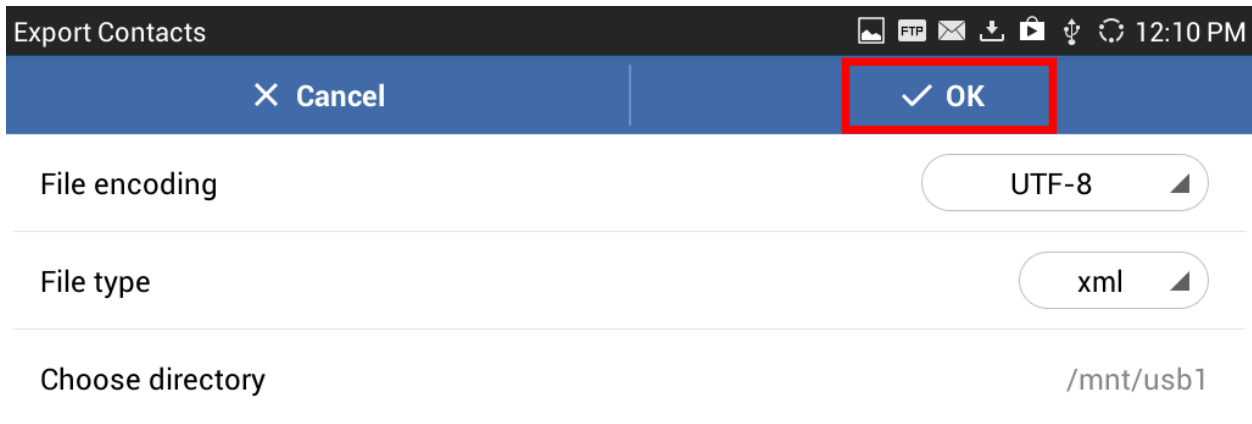


Figure 12: Export Phone Book XML File: Export

XML PHONEBOOK SYNTAX


HEADER

In the first line of the XML document, the following header can be set as XML declaration. It defines the XML version and encoding. On the GXV3275, UTF-8, GBK, UTF-16, UTF-32, Big5, Big5-HKSCS, SHIFT-JIS, ISO8859-1, ISO8859-15, Windows-1251, and EUC-KR can be used as encoding method for correct display. Example:

```
<?xml version="1.0" encoding="UTF-8"?>
```

PHONEBOOK XML STRUCTURE

An XML phone book example for GXV3275 can be found in the last section of this document. The main structure is represented as below.

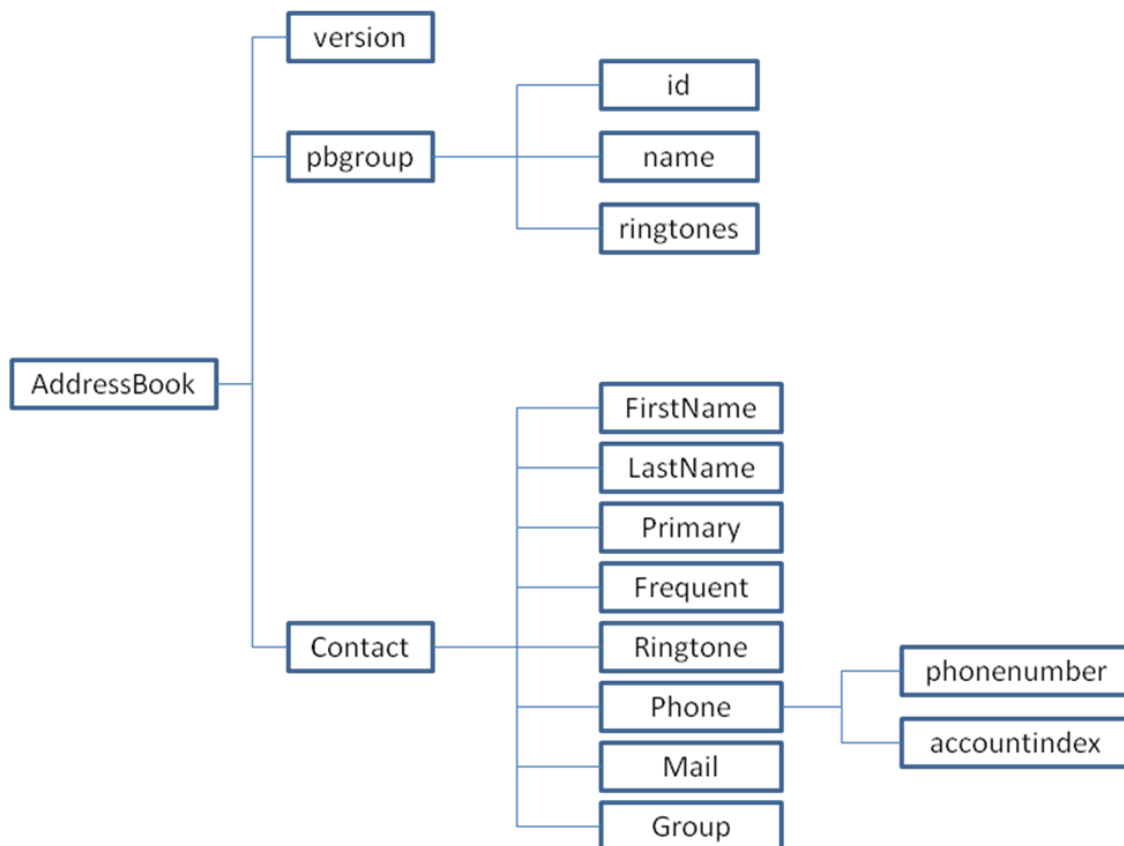

```
<AddressBook>
  <version>Enter version number here. Usually 1</version>
  <pbgroup>
    <id>Enter group id here</id>
    <name>Enter group name here</name>
    <ringtones>Enter ring tone URL for the group</ringtones>
  </pbgroup>
  <pbgroup>
    <!-- Enter another group information here, same format as above -->
  </pbgroup>
  <Contact>
    <FirstName>Enter first name here</FirstName>
    <LastName>Enter last name here</LastName>
    <Primary>Primary number or not</Primary>
    <Frequent>Favorite contact or not</Frequent>
    <Ringtone>Enter ring tone URL here</Ringtone>
    <Phone type="Specify phone type here">
      <phonenumber>Enter phone number here</phonenumber>
      <accountindex>Enter account index here</accountindex>
    </Phone>
    <Mail type="Specify phone type here">Enter Email address here</Mail>
    <Group>Enter group ID here</Group>
  </Contact>
  <Contact>
    <!-- Enter another contact information here, same format as above -->
  </Contact>
</AddressBook>
```

PHONEBOOK XML ELEMENT

This section describes details of the XML element used in GXV3275 XML phone book file. Please note that the element name is case-sensitive when being used in XML document.

ROOT ELEMENT <AddressBook>

<AddressBook> is the root element of the XML document. This element is mandatory.

```
<AddressBook>
  <!-- Enter phone book information here -->
</AddressBook>
```

Table 1: <AddressBook> Element

Object	Position	Type	Values	Comments
AddressBook	Root element	Mandatory	-	Root element of the XML document
version	Child element	Optional	Number	XML format version number. Usually 1.
pbgroup	Child element	Optional	-	Define groups.
Contact	Child element	Mandatory	-	Each contact is a phone book entry.

<pbgroup> ELEMENT

```
<pbgroup>
  <id>Enter group id here</id>
  <name>Enter group name here</name>
  <ringtones>Enter ring tone URL for the group</ringtones>
</pbgroup>
```

Table 2: <pbgroup> Element

Object	Position	Type	Values	Comments
pbgroup	Element	Optional	-	Each pbgroup is a group. More than 1 group can be defined
id	Child element	Optional	Number	To specify group ID.
name	Child element	Mandatory	String	Group name.
ringtones	Child element	Optional	String	The directory/path to the ring tone file stored in the GXV3275.

<Contact> ELEMENT

```

<Contact>
  <FirstName>Enter first name here</FirstName>
  <LastName>Enter last name here</LastName>
  <Primary>Primary number or not</Primary>
  <Frequent>Favorite contact or not</Frequent>
  <Ringtone>Enter ring tone URL here</Ringtone>
  <Phone type="Specify phone type here">
    <phonenumber>Enter phone number here</phonenumber>
    <accountindex>Enter account index here</accountindex>
  </Phone>
  <Mail type="Specify mail type here">Enter Email address here</Mail>
  <Group>Enter group ID here</Group>
</Contact>
  
```

Table 3: <Contact> Element

Object	Position	Type	Values	Comments
Contact	Element	Mandatory	-	Each contact is an entry
FirstName	Child element	Optional	String	Specify first name and last name. At least one of them has to be specified.
LastName	Child element	Optional	String	
Primary	Child element	Optional	Number	Specify the default phone number. For example, the contact has 3 different phone numbers saved. If <Primary> value is 0, the first number will be used as default when dialing out. If <Primary> value is 1, the second number will be used as default when dialing out.
Frequent	Child element	Optional	Number	0: Default 1: Mark this contact as frequent/favorite
Ringtone	Child element	Optional	String	The directory/path to the ring tone file stored in the GXV3275.
Phone	Child element	Optional	-	Phone number information
Mail	Child element	Optional	String	Specify Email address. It has attribute "type". type: Work/Home/Others
Group	Child element	Optional	number	Specify group ID for this contact.

<Phone> ELEMENT

```

<Phone type="Specify phone type here">
  <phonenumber>Enter phone number here</phonenumber>
  <accountindex>Enter account index here</accountindex>
</Phone>

```

Table 4: <Phone> Element

Object	Position	Type	Values	Comments
Phone	Element	Mandatory	-	It has attribute "type". type: Work/Home/Mobile/Fax/Other
phonenumber	Child element	Mandatory	Number	Phone number
accountindex	Child element	Mandatory	Number	From 0 to 5 for account 1 to account 6

XML PHONEBOOK EXAMPLE

```
<?xml version="1.0" encoding="UTF-8"?>
<AddressBook>
  <version>1</version>
  <pbgroup>
    <id>1</id>
    <name>Blacklist</name>
    <ringtones/>
  </pbgroup>
  <pbgroup>
    <id>2</id>
    <name>Work</name>
    <ringtones/>
  </pbgroup>
  <pbgroup>
    <id>3</id>
    <name>Friend</name>
    <ringtones/system/media/audio/ringtones/Bollywood.ogg</ringtones>
  </pbgroup>
  <Contact>
    <FirstName>John</FirstName>
    <LastName>Doe</LastName>
    <Primary>0</Primary>
    <Frequent>0</Frequent>
    <Ringtone>/system/media/audio/ringtones/Backroad.ogg</Ringtone>
    <Phone type="Work">
      <phonenumber>8001</phonenumber>
      <accountindex>1</accountindex>
    </Phone>
    <Phone type="Home">
      <phonenumber>3000001</phonenumber>
      <accountindex>0</accountindex>
    </Phone>
    <Phone type="Mobile">
      <phonenumber>1234567890</phonenumber>
      <accountindex>0</accountindex>
    </Phone>
    <Mail type="Home">JohnDoe@mycompany.com</Mail>
```

```
<Group>1</Group>
</Contact>
<Contact>
  <FirstName>Michael</FirstName>
  <LastName>Tsai</LastName>
  <Primary>2</Primary>
  <Frequent>0</Frequent>
  <Phone type="Work">
    <phonenumber>8002</phonenumber>
    <accountindex>1</accountindex>
  </Phone>
  <Phone type="Home">
    <phonenumber>3000002</phonenumber>
    <accountindex>0</accountindex>
  </Phone>
  <Phone type="Mobile">
    <phonenumber>1234567889</phonenumber>
    <accountindex>0</accountindex>
  </Phone>
  <Mail type="Other">MichaelTsai@mywebsite.com</Mail>
  <Group>2</Group>
</Contact>
<Contact>
  <FirstName>Alex</FirstName>
  <LastName>Smith</LastName>
  <Primary>0</Primary>
  <Frequent>1</Frequent>
  <Ringtone>/system/media/audio/ringtones/bellcore-dr1.ogg</Ringtone>
  <Phone type="Work">
    <phonenumber>8003</phonenumber>
    <accountindex>0</accountindex>
  </Phone>
  <Phone type="Home">
    <phonenumber>3000002</phonenumber>
    <accountindex>0</accountindex>
  </Phone>
  <Phone type="Mobile">
    <phonenumber>2345678888</phonenumber>
    <accountindex>0</accountindex>
  </Phone>
```

```
<Mail type="Work">AlexSmith@myserver.com</Mail>  
<Group>3</Group>  
</Contact>  
</AddressBook>
```



Note:

1. The maximum number of contacts supported on GXV3275 is 1000. Users could open **Contacts->Options->Storage status** to check the number of contacts.
 2. The Ringtone setting in "Contact" has higher priority to the ringtone setting for "Group".
-